


EVM

LIGHT STAINLESS STEEL VERTICAL MULTI-STAGE CENTRIFUGAL PUMP



● Performance scope

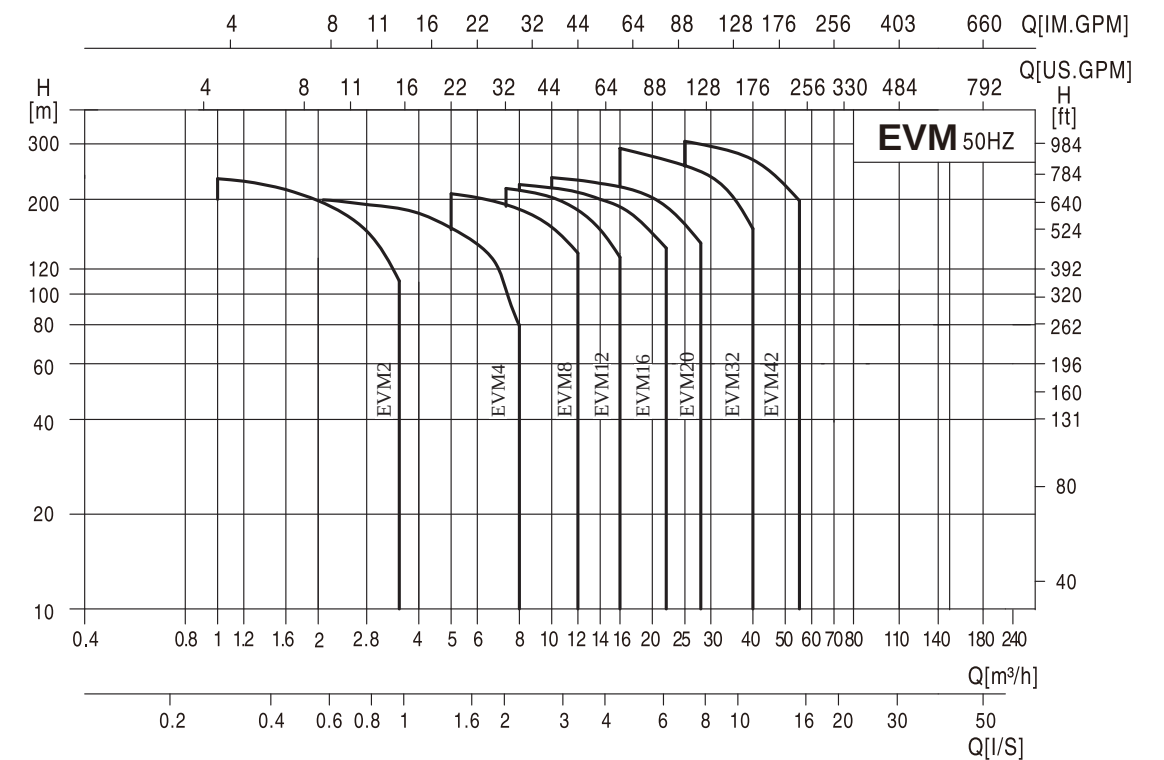

● Product range

Description	EVM2	EVM4	EVM8	EVM12	EVM16	EVM20	EVM32	EVM42
Rated flow[m³/h]	2	4	8	12	16	20	32	42
Rated flow[l/s]	0.56	1.1	2.2	3.3	4.4	5.6	8.9	11.7
Flow range[m³/h]	1-3.5	1.5-7	5-12	7-16	8-22	10-28	16-40	25-55
Flow range[l/s]	0.28-0.97	0.42-1.9	1.4-3.3	1.9-4.4	2.2-6.1	2.8-7.8	4.4-11.1	6.9-15.3
Max.pressure[bar]	23	21	21	22	22	23	29	30
Motor power[kW]	0.37-3	0.37-4	0.75-7.5	1.5-11	2.2-15	1.1-18.5	1.5-30	3.0-45
Temperature range[°C]	-15~+120							
Max.efficiency[%]	46	57	62	63	66	69	73	75
Type								
EVM	●	●	●	●	●	●	●	●
EVMPipe connection								
DIN Flange	Dn25	Dn32	Dn40	DN50	DN50	DN50	DN65	DN80
Cutting ferrule joint	DN32	DN32	DN50	DN50	DN50	DN50		
Pipe thread	ZG1¼	ZG1¼	ZG2	ZG2	ZG2	ZG2		

● Pump

EVM is a kind of vertical non-self priming multistage centrifugal pump, which is driven by a standard electric motor. The motor output shaft directly connects with the pump shaft through a coupling. The pres-sure-resistant cylinder and flow passage components are fixed between pump head and inlet &outlet section with stay bolts. The inlet and outlet are located at the pump bottom at the same plane. This kind of pump can be equipped with an intelligent protector to effectively prevent it from dry-running, out-of-phase and overload.

● Motor

Full-enclosed air-blast two-pole standard motor
Protection class: IP55
Insulation class: F
Standard voltage: 50Hz: 1×220-230/240V
3×200-220/346-380V
3×220-240/380-415V
3×380-415V

● Operation conditions

- Thin, clean, non-flammable and non-explosive liquid containing no solid granules and fibers.
- **Liquid temperature:**
Normal temperature type: $-15^{\circ}\text{C} \sim +70^{\circ}\text{C}$,
Hot water type: $-15^{\circ}\text{C} \sim +120^{\circ}\text{C}$
- **Ambient temperature:** up to $+40^{\circ}\text{C}$
- **Altitude:** up to 1000m

● Application

EVM is a kind of multinational products. It can be used to convey various medium from tap water to industrial liquid at different temperature and with different flow rate and pressure. EVM is suitable for slightly corrosive liquid.

Water supply: Water filter and transport in Water works, boosting of main pipeline, boosting in high-rise buildings.

Industrial boosting: Process flow water system, cleaning system, high-pressure washing system, fire fighting system.


Industrial liquid conveying: Cooling and air-conditioning system, boiler water supply and condensing system, machine-associated purpose, acids and alkali.

Water treatment: Ultra-filtration system, reverse osmosis system, distillation system, separator, swimming pool.


Irrigation: Farmland irrigation, spray irrigation, dripping irrigation.

● Definition of Model

1. EVM2,4,8,12,16,20

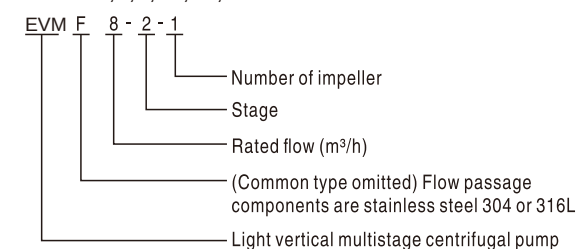

2. EVM32,42

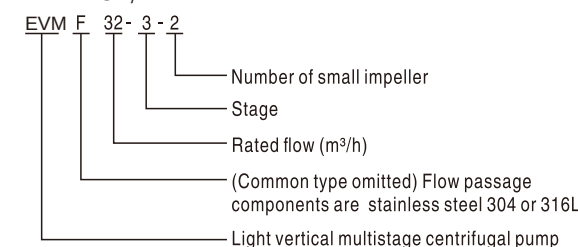


● Max.Working pressure

Model	Curve number
EVM2,4 Flange, cutting ferrule joint, pipe thread	1
EVM8,12,16,20 Flange, cutting ferrule joint, pipe thread	2
EVM32	4
EVM42	
42-10-1~42-90	3(*)
42-100-2~42-130-2	4


- * :For curve 4, need to specify especially;
- ** :For curve 3, need to specify especially.

The following figure shows the limitation of pressure and temperature, which shall be in the scope as shown in the figure.

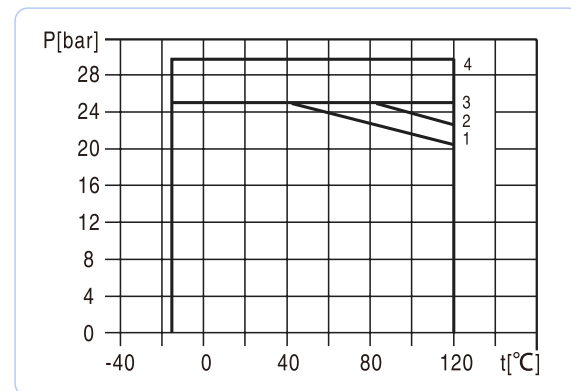


● Max.Ambient temperature

When the pump operates under ambient temperature higher than 40°C or under altitude higher than 1000m, because of low air density and poor cooling effects, the motor output power P_2 will be decreased to certain extent. If the pump is operated under the above-said conditions, it should be equipped with motor of higher power.

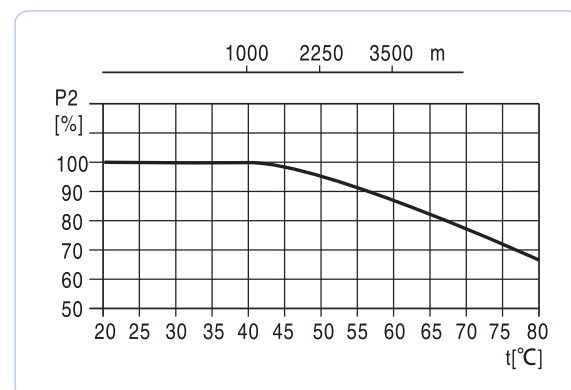

● Curve illustration

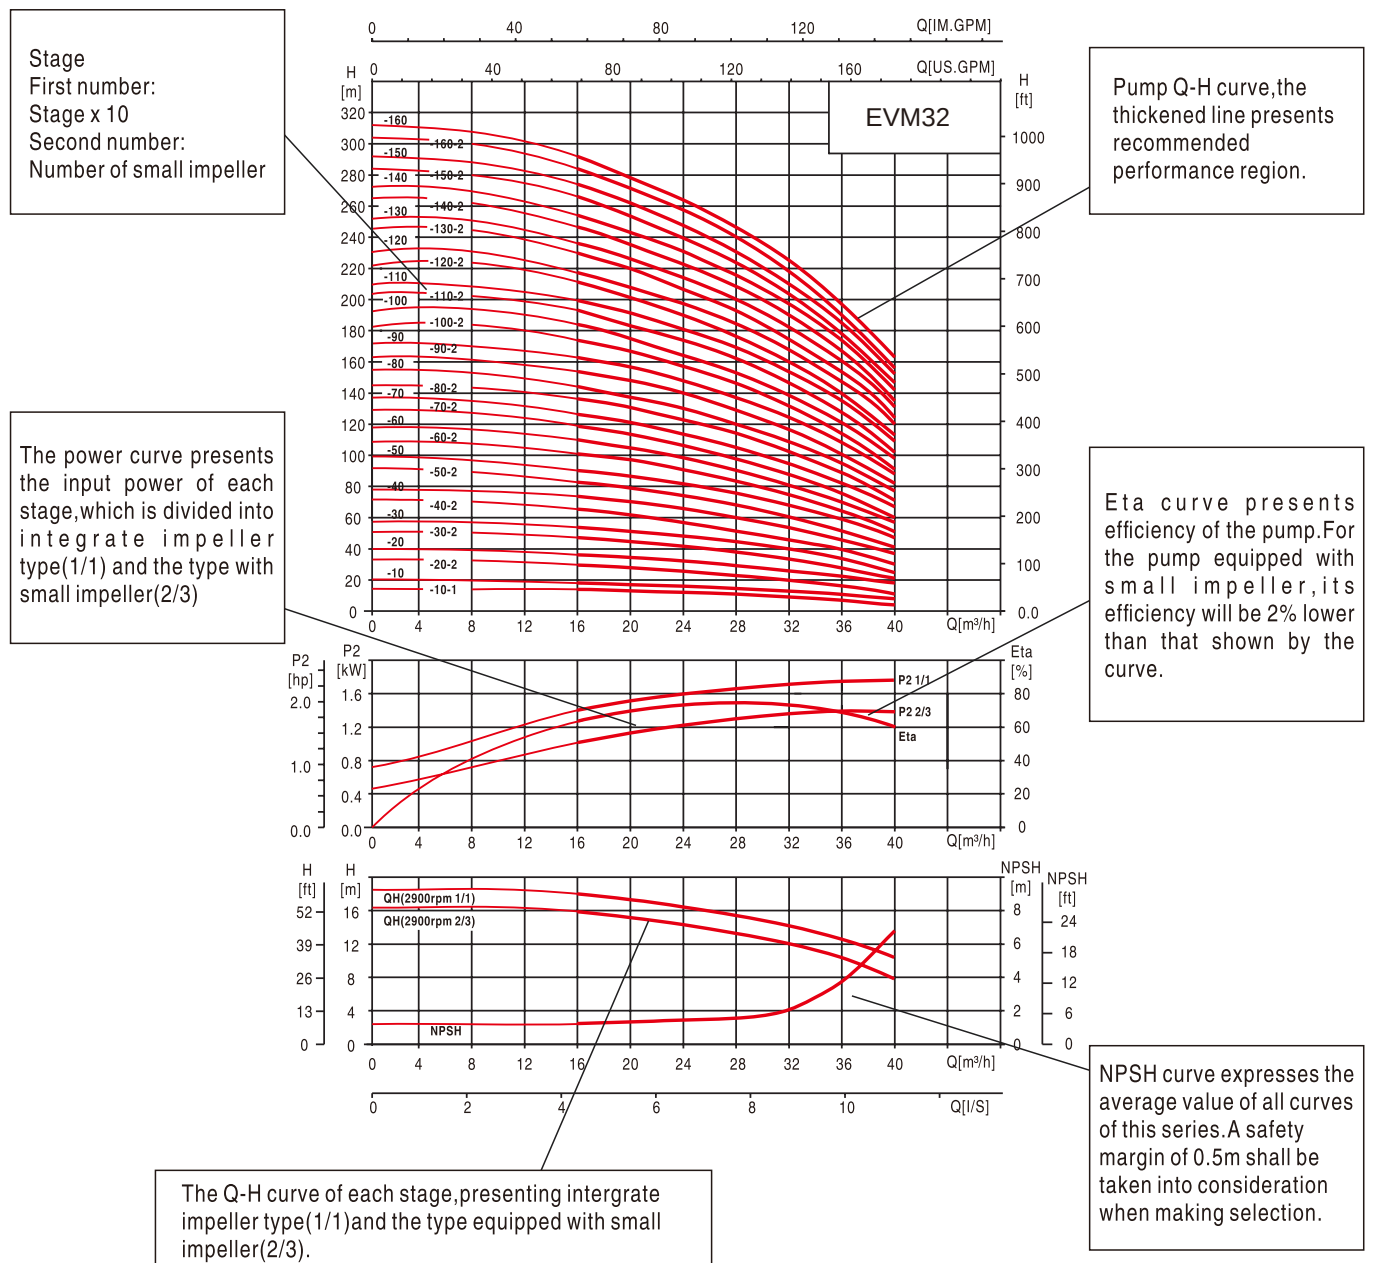


● Performance curve

Following conditions are suitable for the performance curves shown below:

1. All curves are based on the measured values of 50Hz: constant motor speed 2900rpm or 2950rpm.
2. Curve tolerance in conformity with ISO9906 Annex A.
3. Measurement is done with 20°C air-free water, kinematic viscosity of $1\text{mm}^2/\text{sec}$.
4. The operation of pump shall refer to the performance region indicated by the thickened curve to prevent overheating due to too small flow rate or overload of motor due to too large flow rate.

Minimum inlet pressure NPSH

In case that the pressure in pump is lower than the steam pressure used to convey liquid, the cavitations will occur. To avoid cavitations, a minimum pressure at the inlet side of the pump shall be guaranteed.

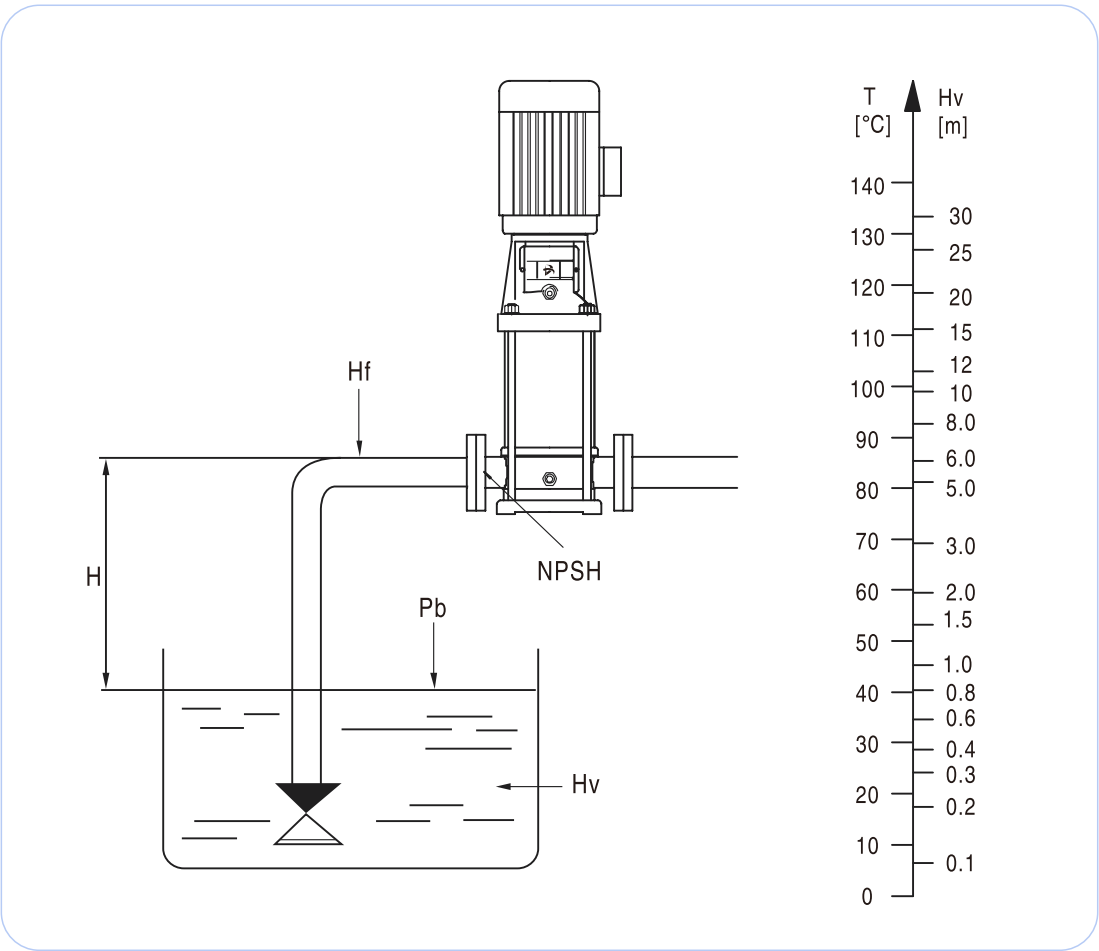


Check and ensure that the pump is not at cavitations state.


Operation in parallel

Connecting several pumps in parallel running will benefit much more than running a single large pump.

- Applicable to different working states necessary in a variable flow system.
- Increasing the possibility of water supply when the pump is in failure. Because in case of pump failure, only part of the system flow is effected.

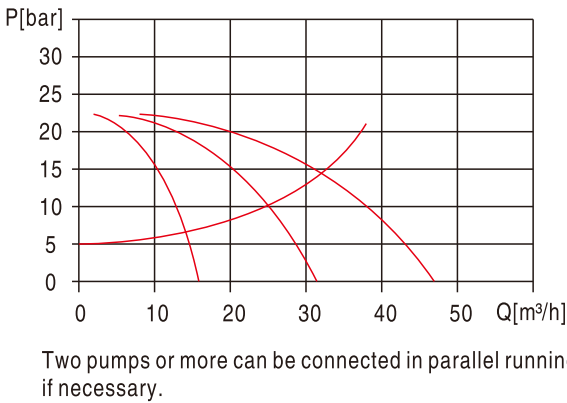

Section drawing EVM2,4

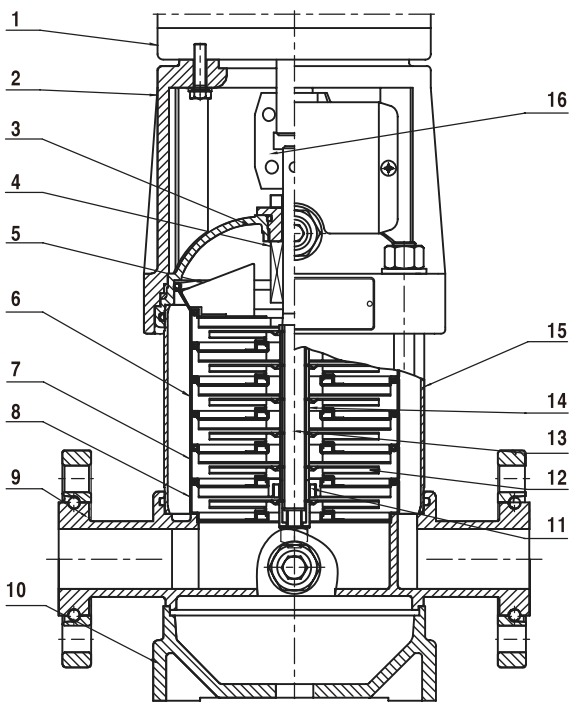


EVM

Material EVM2,4

NO.	Name	Material	AISI/ASTM	NO.	Name	Material	AISI/ASTM
1	Motor			13	Shaft	Stainless steel	AISI304 AISI316L
2	Pump head	Cast iron	ASTM25B	14	Impeller sleeve	Stainless steel	AISI304
4	Mechanical seal			15	Cylinder	Stainless steel	AISI304
5	Top diffuser	Stainless steel	AISI304	16	Coupling	Carbon steel	
6	Diffuser	Stainless steel	AISI304	EVM			
7	Support diffuser	Stainless steel	AISI304	3	Seal base	Stainless steel	AISI304
8	Inducer	Stainless steel	AISI304	9	Inlet and outlet chamber	Stainless steel	AISI304
11	Bearing	Tungsten carbide		10	Base plate	Cast iron	ASTM25B
12	Impeller	Stainless steel	AISI304				

● Section drawing EVM8,12,16,20

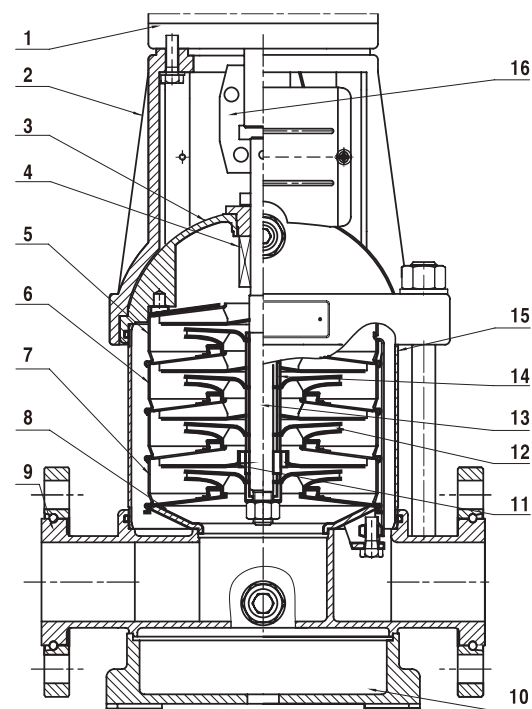


EVM

● Material EVM8,12,16,20

NO.	Name	Material	AISI/ASTM	NO.	Name	Material	AISI/ASTM
1	Motor			13	Shaft	Stainless steel	AISI304 AISI316L
2	Pump head	Cast iron	ASTM25B	14	Impeller sleeve	Stainless steel	AISI304
4	Mechanical seal			15	Cylinder	Stainless steel	AISI304
5	Top diffuser	Stainless steel	AISI304	16	Coupling	Carbon steel	
6	Diffuser	Stainless steel	AISI304			EVM	
7	Support diffuser	Stainless steel	AISI304	3	Seal base	Stainless steel	AISI304
8	Inducer	Stainless steel	AISI304	9	Inlet and outlet chamber	Stainless steel	AISI304
11	Bearing	Tungsten carbide		10	Base plate	Cast iron	ASTM25B
12	Impeller	Stainless steel	AISI304				

● Section drawing EVM32,42

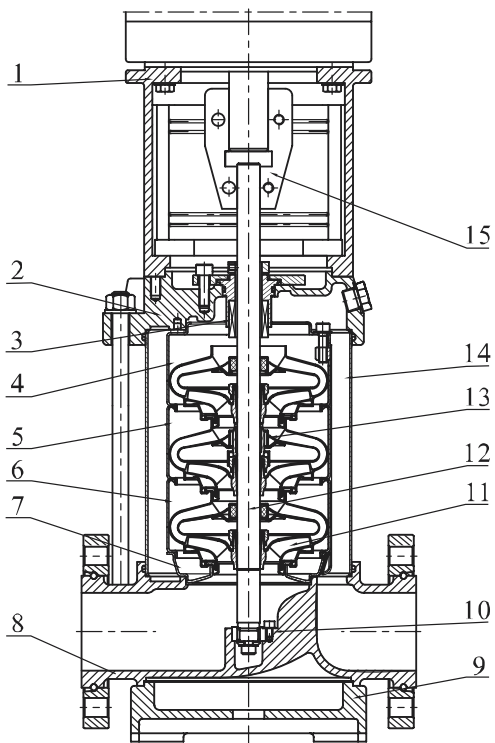

EVM


● Material EVM32,42

NO.	Name	Material	AISI/ASTM	NO.	Name	Material	AISI/ASTM
1	Bracket	Cast iron	ASTM25B	12	Shaft	Stainless steel	AISI316L AISI304 AISI431
3	Mechanical seal			13	Intermediate bearing	Tungsten carbide	
4	Top diffuser	Stainless steel	AISI304	14	Cylinder	Stainless steel	AISI304
5	Support diffuser	Stainless steel	AISI304	15	Coupling	Carbon steel	
6	Diffuser	Stainless steel	AISI304		Rubber parts	NBR	
7	Inducer	Stainless steel	AISI304			EVM	
9	Base plate	Cast iron	ASTM25B	2	Pump head	Stainless steel	AISI304
10	Bottom bearing	Tungsten carbide		8	Inlet and outlet chamber	Stainless steel	AISI304
11	Impeller	Stainless steel	AISI304				

EVM2, 50Hz

● Performance curve


2900rpm

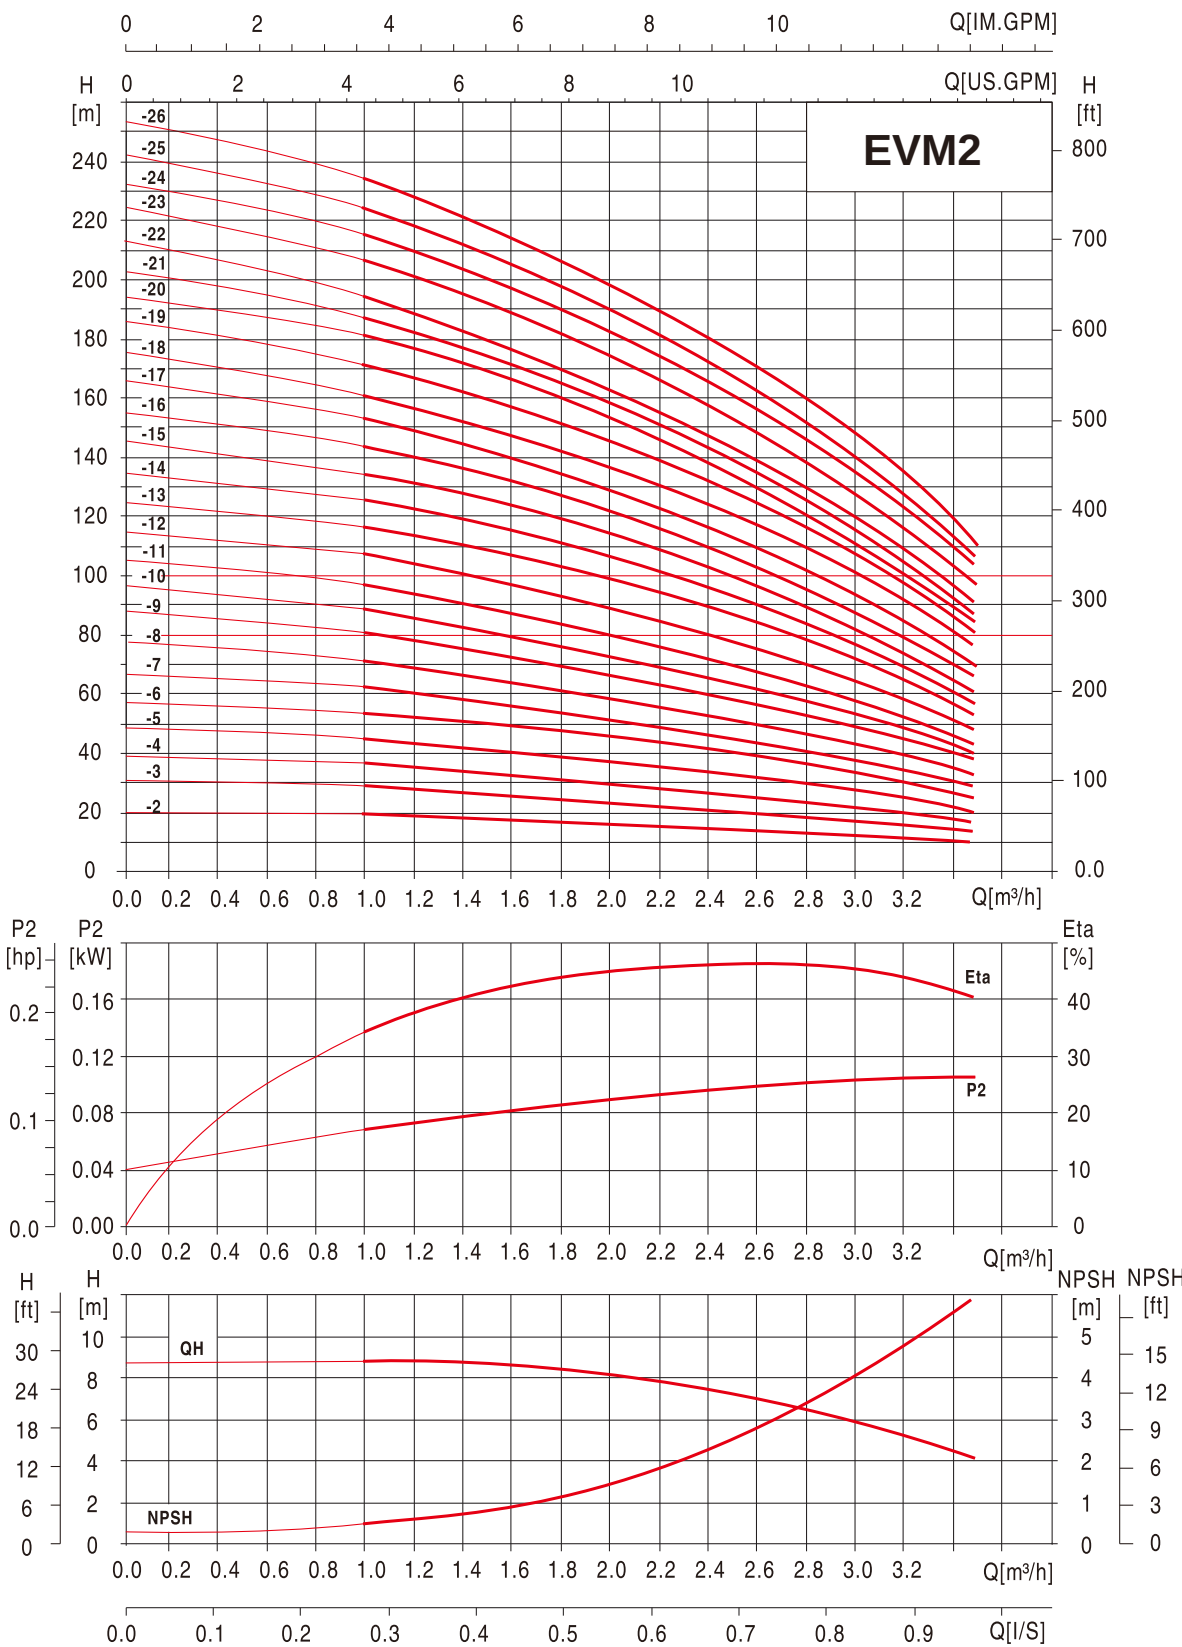

● Performance table

Model	Driving motor		Inlet/Outlet	Q (m³)	1	1.2	1.6	2.0	2.4	2.8	3.2	3.5
	(kw)	(Hp)										
EVM2-2	0.37	0.5	1"/1"	H (m)	18	17	16	15	13	12	10	8
EVM2-3	0.37	0.5			27	26	24	22	20	18	15	12
EVM2-4	0.55	0.75			36	35	33	30	26	24	20	16
EVM2-5	0.55	0.75			45	43	40	37	33	30	24	20
EVM2-6	0.75	1			53	52	50	45	40	36	30	24
EVM2-7	0.75	1			63	61	57	52	47	41	35	28
EVM2-9	1.1	1.5			80	78	73	67	61	54	45	37
EVM2-11	1.1	1.5			98	95	89	82	73	64	54	44
EVM2-13	1.5	2			116	114	106	98	89	78	64	52
EVM2-15	1.5	2			134	130	123	112	100	90	73	60
EVM2-18	2.2	3			161	157	148	136	121	108	91	76
EVM2-22	2.2	3			197	192	180	165	148	130	110	90
EVM2-26	3.0	4			232	228	214	198	179	158	130	110

● Installation sketch

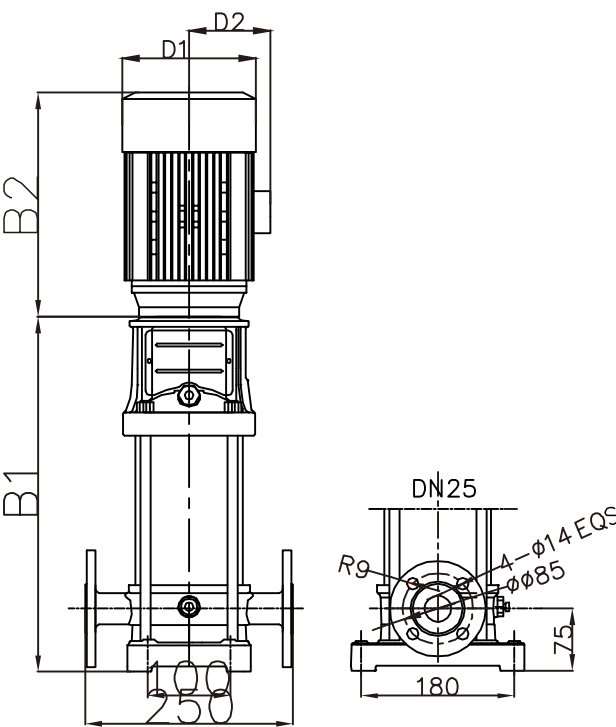

● Size and weight


Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM2-2	259	235	494	170	120	20
EVM2-3	277	235	512	170	120	20
EVM2-4	295	235	530	170	120	22
EVM2-5	313	235	548	170	120	23
EVM2-6	332	240	572	170	120	26
EVM2-7	350	240	590	170	120	26
EVM2-9	386	240	626	170	120	28
EVM2-11	422	240	662	170	120	29
EVM2-13	429	280	709	180	130	35
EVM2-15	515	280	795	180	130	36
EVM2-18	570	280	850	180	130	41
EVM2-22	630	280	910	180	130	42
EVM2-26	690	280	970	180	130	52

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.

EVM4, 50Hz

● Performance curve


2900rpm

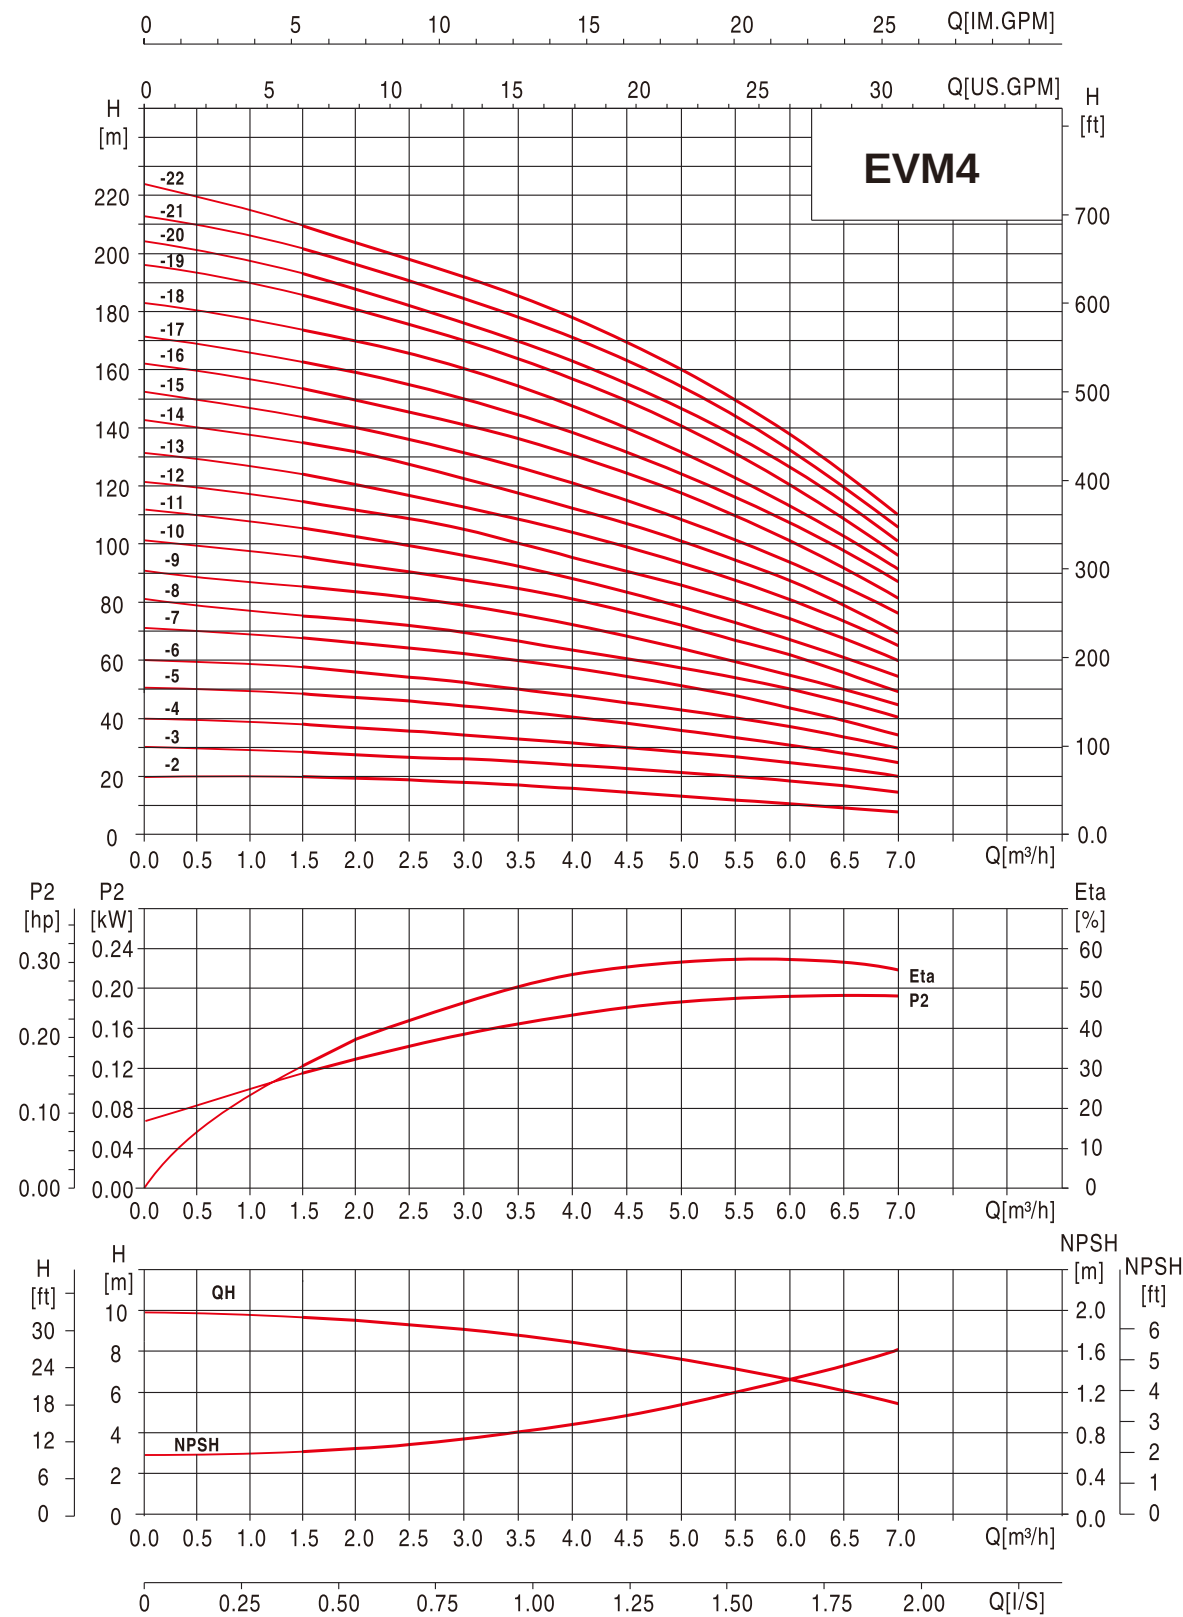

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	1.5	2.0	3.0	4.0	5.0	6.0	7.0
	(kw)	(Hp)									
EVM4-2	0.37	0.5	1.25"/ 1.25"	H (m)	19	18	17	15	13	10	8
EVM4-3	0.55	0.75			28	27	26	24	20	18	13
EVM4-4	0.75	1			38	36	34	32	27	24	19
EVM4-5	1.1	1.5			47	45	43	40	34	31	23
EVM4-6	1.1	1.5			56	54	52	48	41	37	28
EVM4-7	1.5	2			66	63	61	56	48	43	33
EVM4-8	1.5	2			74	72	70	64	55	50	38
EVM4-10	2.2	3			96	90	87	81	71	62	48
EVM4-12	2.2	3			114	108	104	95	85	75	58
EVM4-14	3.0	4			136	126	122	112	101	89	68
EVM4-16	3.0	4			152	144	140	129	115	101	78
EVM4-19	4.0	5.5			183	171	168	153	137	122	93
EVM4-22	4.0	5.5			211	200	192	178	160	138	108

● Installation sketch

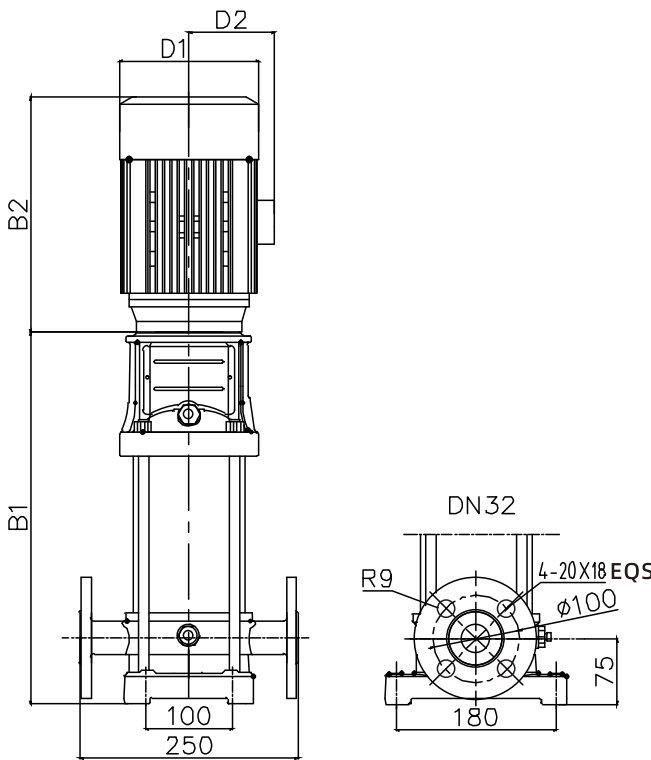

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.


● Size and weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM4-2	255	235	490	170	110	21
EVM4-3	282	235	517	170	110	22
EVM4-4	309	260	569	170	110	25
EVM4-5	336	260	596	170	110	27
EVM4-6	390	260	650	170	110	27
EVM4-7	420	300	720	180	110	33
EVM4-8	447	300	747	180	110	33
EVM4-10	510	300	810	180	110	37
EVM4-12	565	300	865	180	110	38
EVM4-14	642	310	952	180	135	46
EVM4-16	696	310	1006	180	135	48
EVM4-19	777	350	1127	180	135	57
EVM4-22	858	350	1208	180	135	59

EVM8, 50Hz

● Performance curve


2900rpm

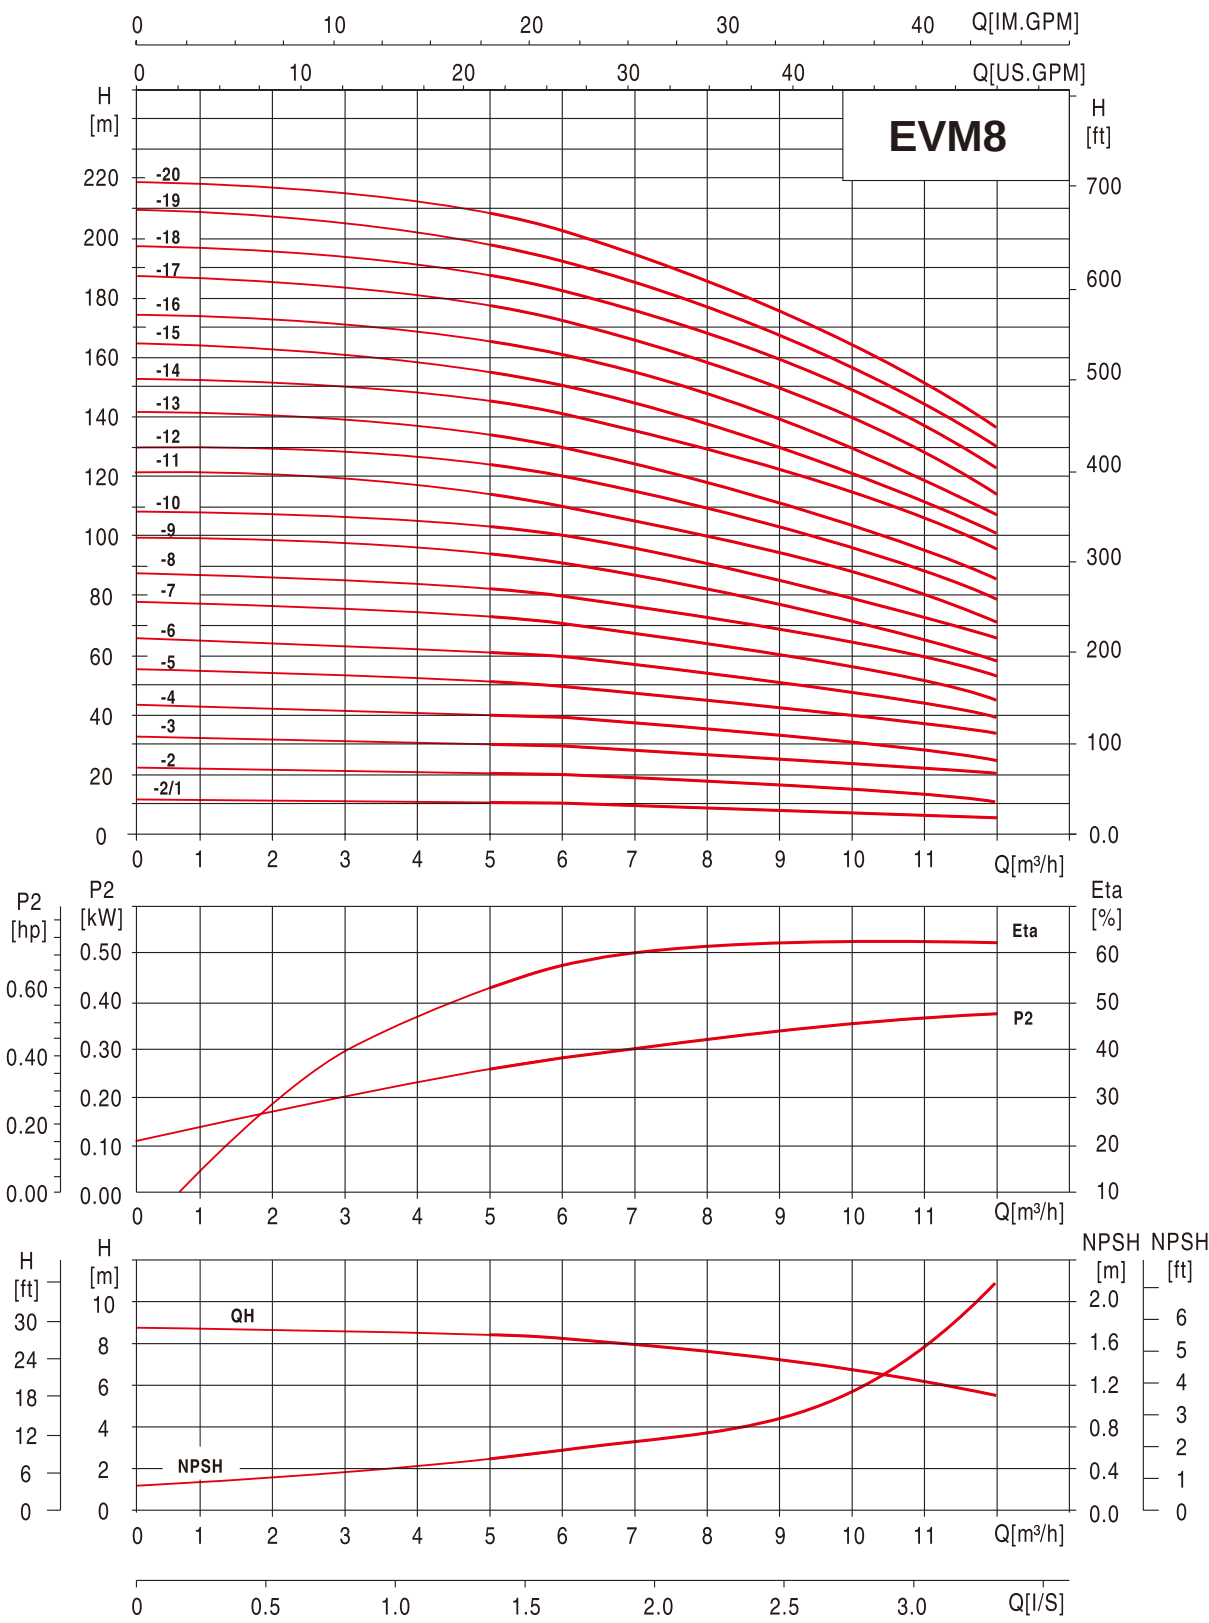

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	5	6	7	8	9	10	11	12
	(kw)	(Hp)										
EVM8-2	0.75	1	1.5"/1.5"	H (m)	20	19.5	19	18	17	16	14	13
EVM8-3	1.1	1.5			30	29.5	28.5	27	25	24	21	19
EVM8-4	1.5	2			41	39.5	38	36	34	32	28	26
EVM8-5	2.2	3			52	50	48	45	42	40	36	32
EVM8-6	2.2	3			62	60	57	54	51	48	43	37
EVM8-8	3.0	4			83	80	77	73	69	65	58	52
EVM8-10	4.0	5.5			104	100	97	92	87	81	73	65
EVM8-12	4.0	5.5			124	120	116	111	104	92	87	78
EVM8-14	5.5	7.5			145	141	136	130	122	113	102	92
EVM8-16	5.5	7.5			166	161	156	148	139	130	118	106
EVM8-18	7.5	10			187	182	175	167	157	146	134	120
EVM8-20	7.5	10			208	202	195	186	175	163	150	135

● Installation sketch

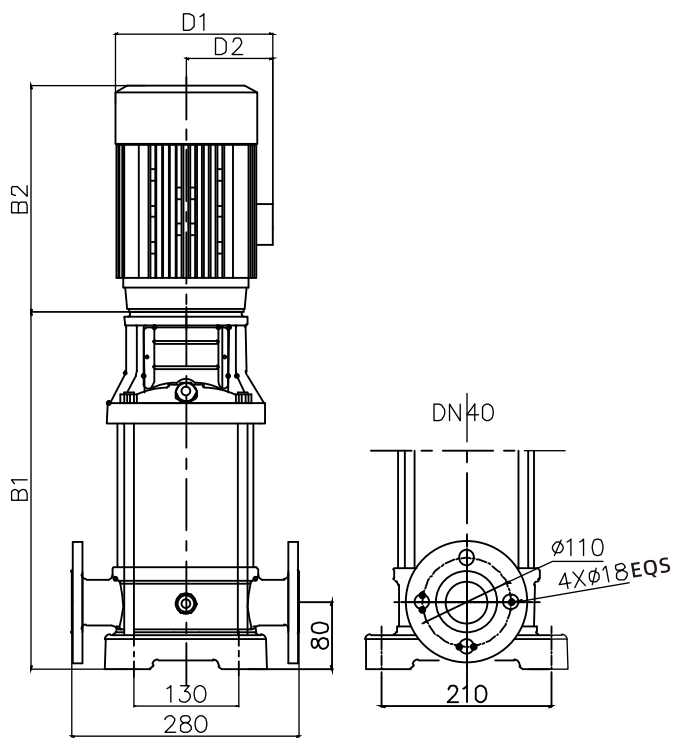

● Size and weight


Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM8-2	320	240	560	170	105	32
EVM8-3	350	240	590	170	105	34
EVM8-4	385	240	625	175	110	40
EVM8-5	415	240	655	175	110	44
EVM8-6	445	240	685	175	110	45
EVM8-8	520	315	835	180	175	53
EVM8-10	580	315	895	180	175	64
EVM8-12	640	315	955	180	175	66
EVM8-14	720	415	1135	258	180	81
EVM8-16	780	415	1195	258	180	84
EVM8-18	840	415	1255	258	180	93
EVM8-20	900	415	1315	258	180	94

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.

EVM12, 50Hz

● Performance curve


2900rpm

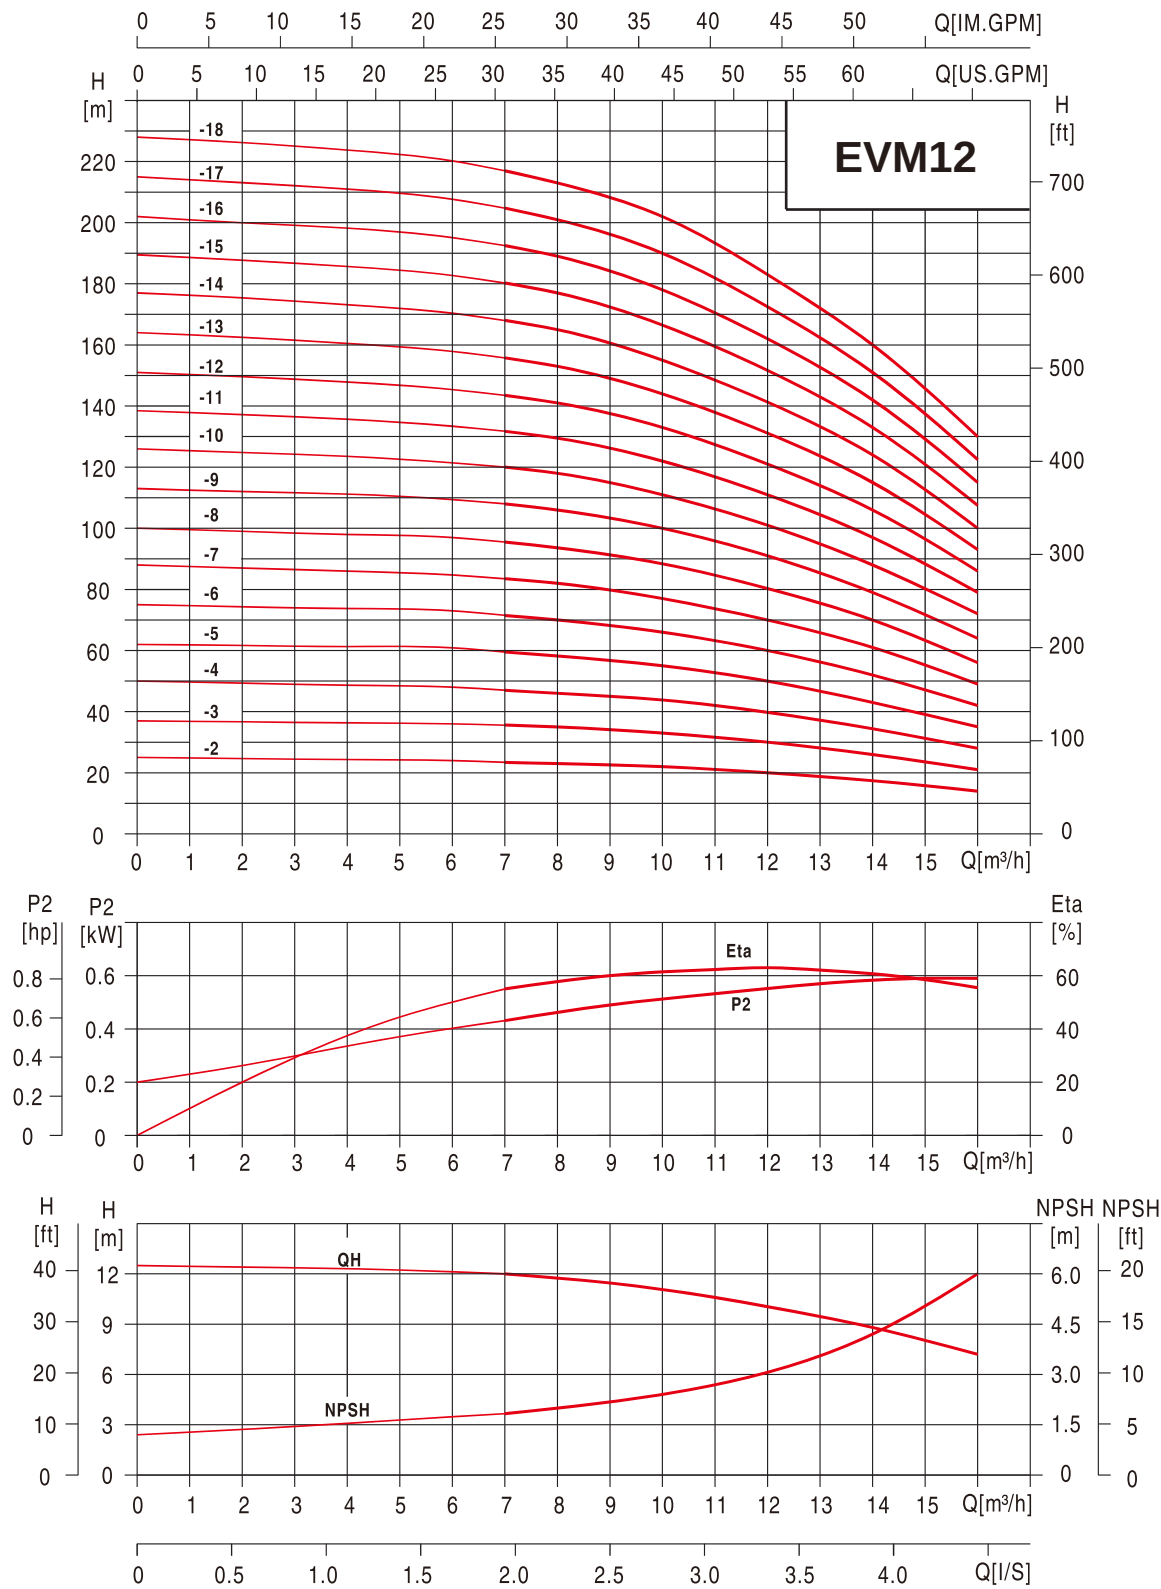

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	7	8	9	10	11	12	13	14	15	16
	(kw)	(Hp)												
EVM12-2	1.5	2	2"/2"	H (m)	23.5	23	22.5	22	21	20	18.5	17	15.5	14
EVM12-3	2.2	3			35.5	35	34	33	31.5	30	28	26	23.5	21
EVM12-4	3.0	4			47	46	45	44	42	40	37	34	31	28
EVM12-5	3.0	4			59.5	58	56.5	55	52.5	50	46.5	43	39	35
EVM12-6	4.0	5.5			71.5	70	68	66	63	60	56	52	47	42
EVM12-7	5.5	7.5			83.5	82	79.5	77	73.5	70	65.5	61	55	49
EVM12-8	5.5	7.5			95.5	94	91	88	84	80	75	70	63	56
EVM12-9	5.5	7.5			108	106	103	100	95.5	91	85	79	71.5	64
EVM12-10	7.5	10			120	118	114.5	111	106	101	94.5	88	80	72
EVM12-12	7.5	10			143.5	141	137	133	127	121	113.5	106	96	86
EVM12-14	11	15			168	165	160	155	148	141	132.5	124	112	100
EVM12-16	11	15			192.5	189	183.5	178	170	162	152	142	128.5	115
EVM12-18	11	15			217	213	207.5	202	192.5	183	171.5	160	145	130

● Installation sketch

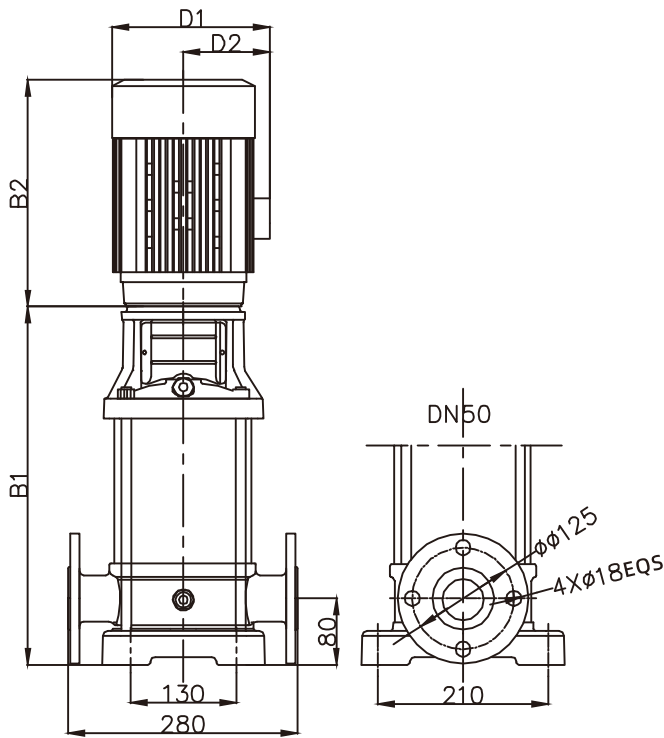

● Size and weight


Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM12-2	325	280	605	195	110	39
EVM12-3	355	280	635	195	110	43
EVM12-4	400	310	710	240	135	51
EVM12-5	400	350	740	240	135	53
EVM12-6	445	350	795	240	135	61
EVM12-7	505	415	920	258	160	73
EVM12-8	535	415	950	258	160	74
EVM12-9	565	415	980	258	160	76
EVM12-10	595	415	1010	258	160	83
EVM12-12	655	415	1070	258	160	87
EVM12-14	750	500	1250	300	215	157
EVM12-16	810	500	1310	300	215	161
EVM12-18	870	500	1370	300	215	164

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.

EVM16, 50Hz

● Performance curve


2900rpm

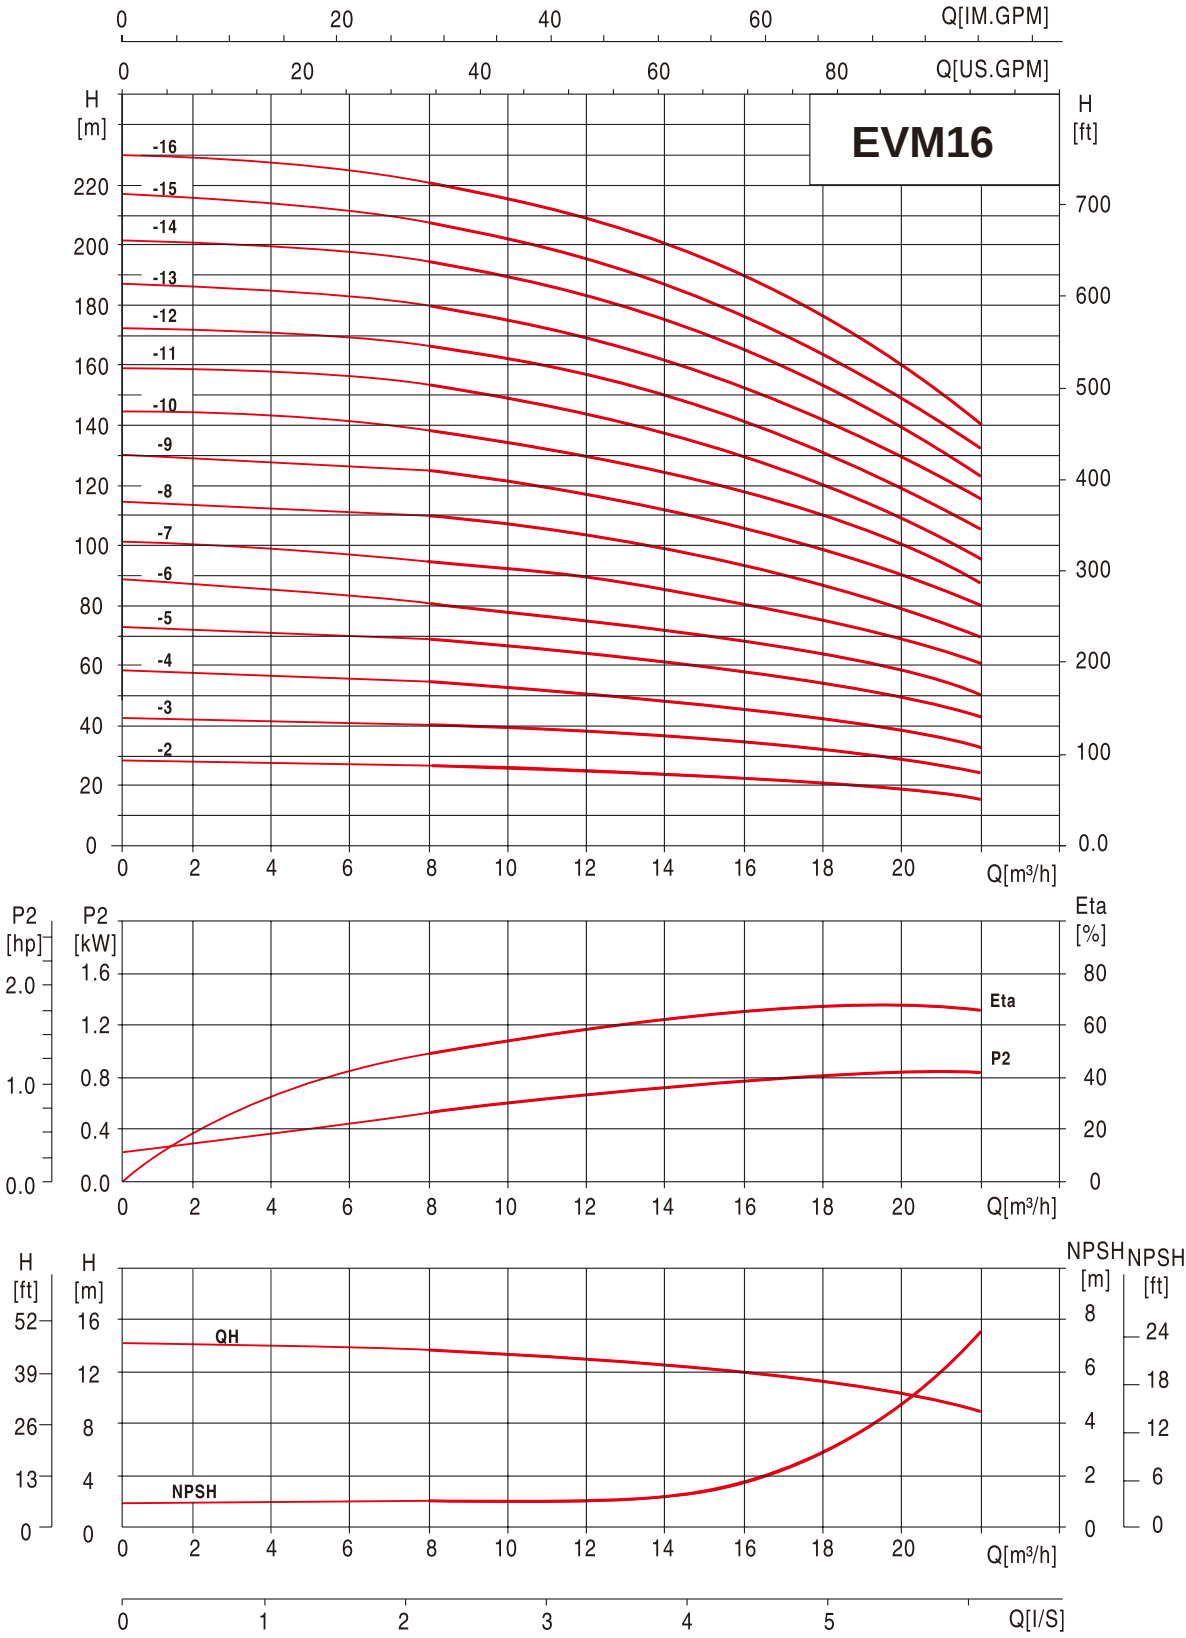

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	8	10	12	14	16	18	20	22
	(kw)	(Hp)										
EVM16-2	2.2	3	2"/2"	H (m)	27	26	25	24	22	21	19	16
EVM16-3	3.0	4			41	40	38	37	34	32	29	25
EVM16-4	4.0	5.5			54	53	52	49	46	43	38	34
EVM16-5	5.5	7.5			68	67	65	62	58	54	48	43
EVM16-6	5.5	7.5			82	80	78	74	70	64	58	52
EVM16-7	7.5	10			96	95	91	87	82	76	68	61
EVM16-8	7.5	10			110	108	104	99	94	86	77	70
EVM16-10	11	15			138	136	131	125	118	109	97	87
EVM16-12	11	15			166	162	157	150	141	130	116	105
EVM16-14	15	20			194	190	184	175	166	152	136	122
EVM16-16	15	20			222	217	210	200	189	174	156	140

● Installation sketch

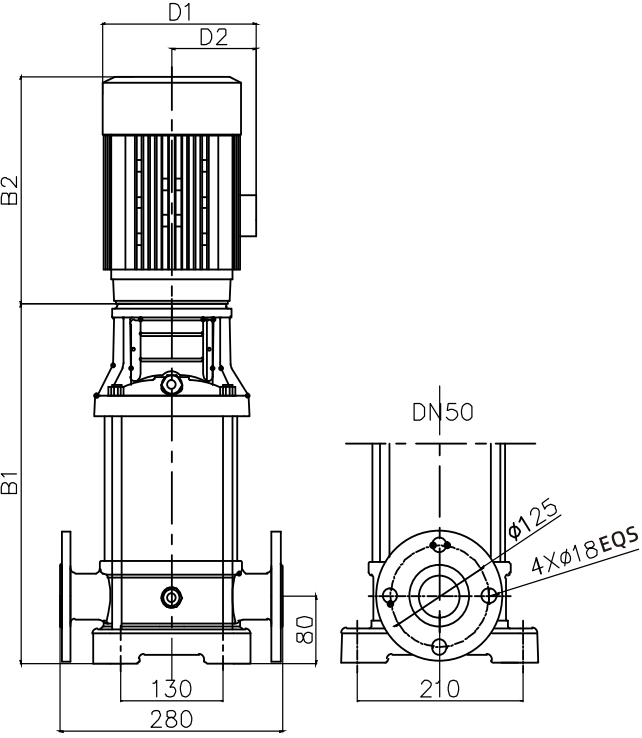

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contast us for details.


● Size and weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM16-2	310	280	590	180	135	42
EVM16-3	395	310	705	195	135	50
EVM16-4	440	350	790	240	135	59
EVM16-5	500	415	915	258	165	76
EVM16-6	545	415	960	258	165	77
EVM16-7	590	415	1005	258	165	84
EVM16-8	635	415	1050	258	220	86
EVM16-10	780	500	1280	300	220	158
EVM16-12	870	500	1370	300	220	161
EVM16-14	960	500	1460	300	220	174
EVM16-16	1050	500	1550	300	220	178

EVM20, 50Hz

● Performance curve


2900rpm

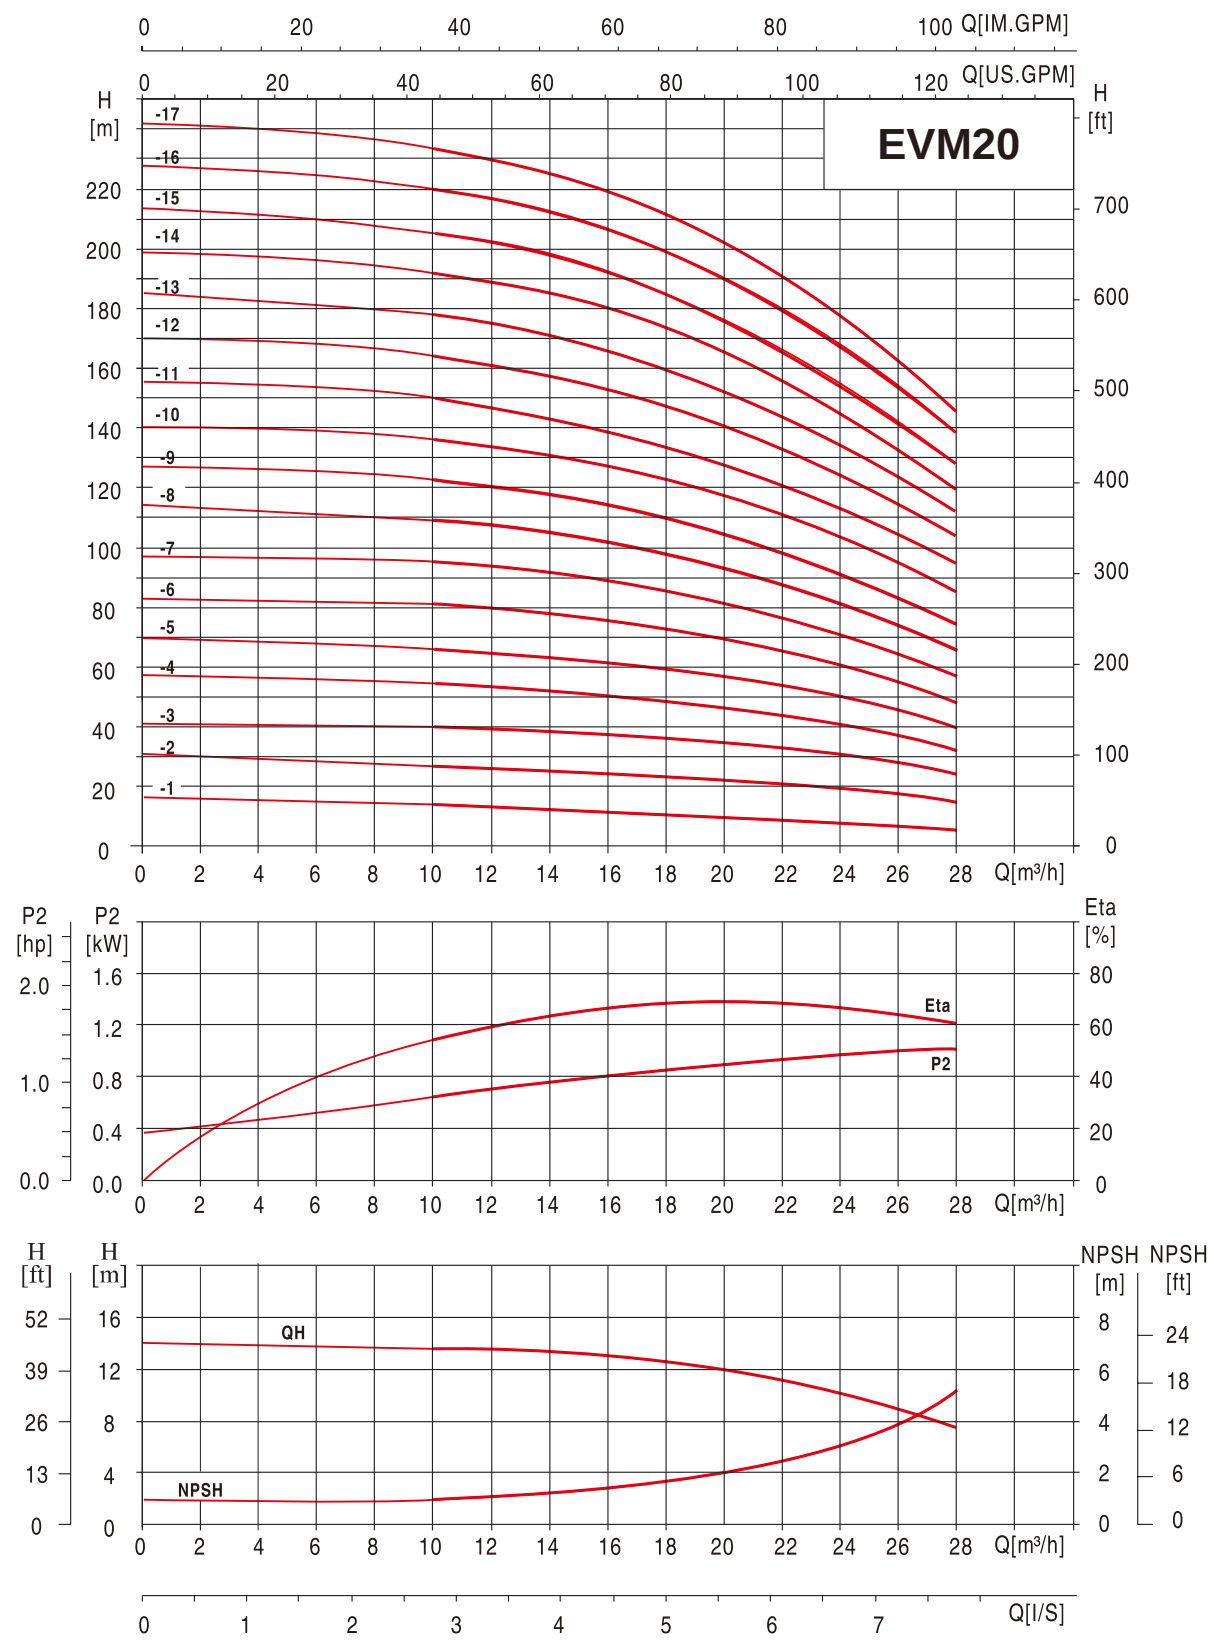

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	10	12	14	16	18	20	22	24	26	28
	(kw)	(Hp)			13.5	13	12.5	12	11	10	9	8	7	6
EVM20-1	1.1	1.5	2"/2"	H (m)	27	26.5	26	25	24	23	22	20	18	15
EVM20-2	2.2	3			40	39.5	39	38	37	35	33	30	27	24
EVM20-3	4.0	5.5			54	53	52	51	49	47	44	41	37	33
EVM20-4	5.5	7.5			67	66	64	62	60	58	55	50	45	40
EVM20-5	5.5	7.5			81	79	77	75	73	70	66	61	55	49
EVM20-6	7.5	10			95	93	91	89	86	82	77	71	65	58
EVM20-7	7.5	10			109	107	105	102	99	94	89	82	75	67
EVM20-8	11	15			136	134	131	128	124	118	111	103	95	85
EVM20-10	11	15			164	162	158	154	149	142	133	124	114	102
EVM20-12	15	20			192	189	185	180	174	166	156	145	133	119
EVM20-14	15	20			234	230	225	219	212	202	190	177	162	145
EVM20-17	18.5	25												

● Installation sketch

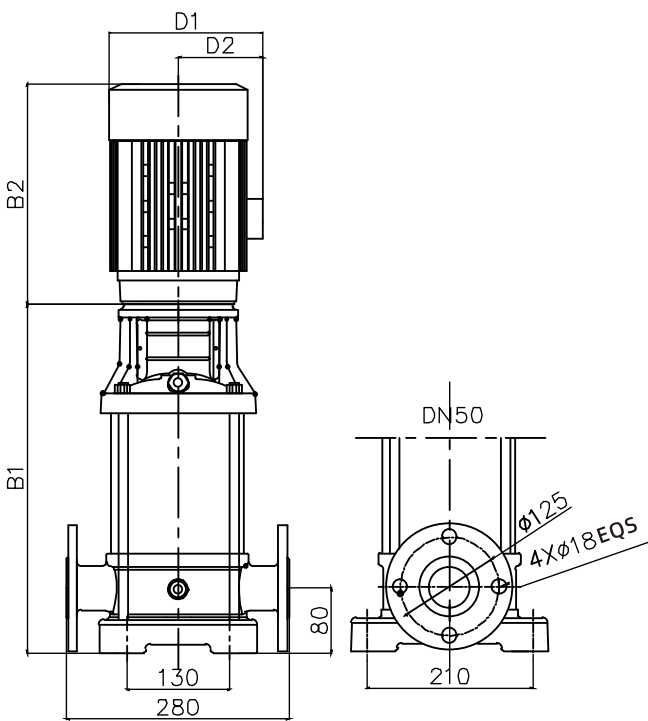

● Size and weight


Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM20-1	290	240	530	180	135	33
EVM20-2	310	280	590	195	135	42
EVM20-3	395	350	745	240	135	58
EVM20-4	460	415	875	258	165	74
EVM20-5	505	415	920	258	165	76
EVM20-6	550	415	965	258	165	82
EVM20-7	645	415	1060	258	220	84
EVM20-8	690	500	1190	300	220	153
EVM20-10	780	500	1280	300	220	157
EVM20-12	870	500	1370	300	220	170
EVM20-14	960	500	1460	300	220	172
EVM20-17	1095	500	1595	300	220	195

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.

EVM32, 50Hz

● Performance curve


2900rpm

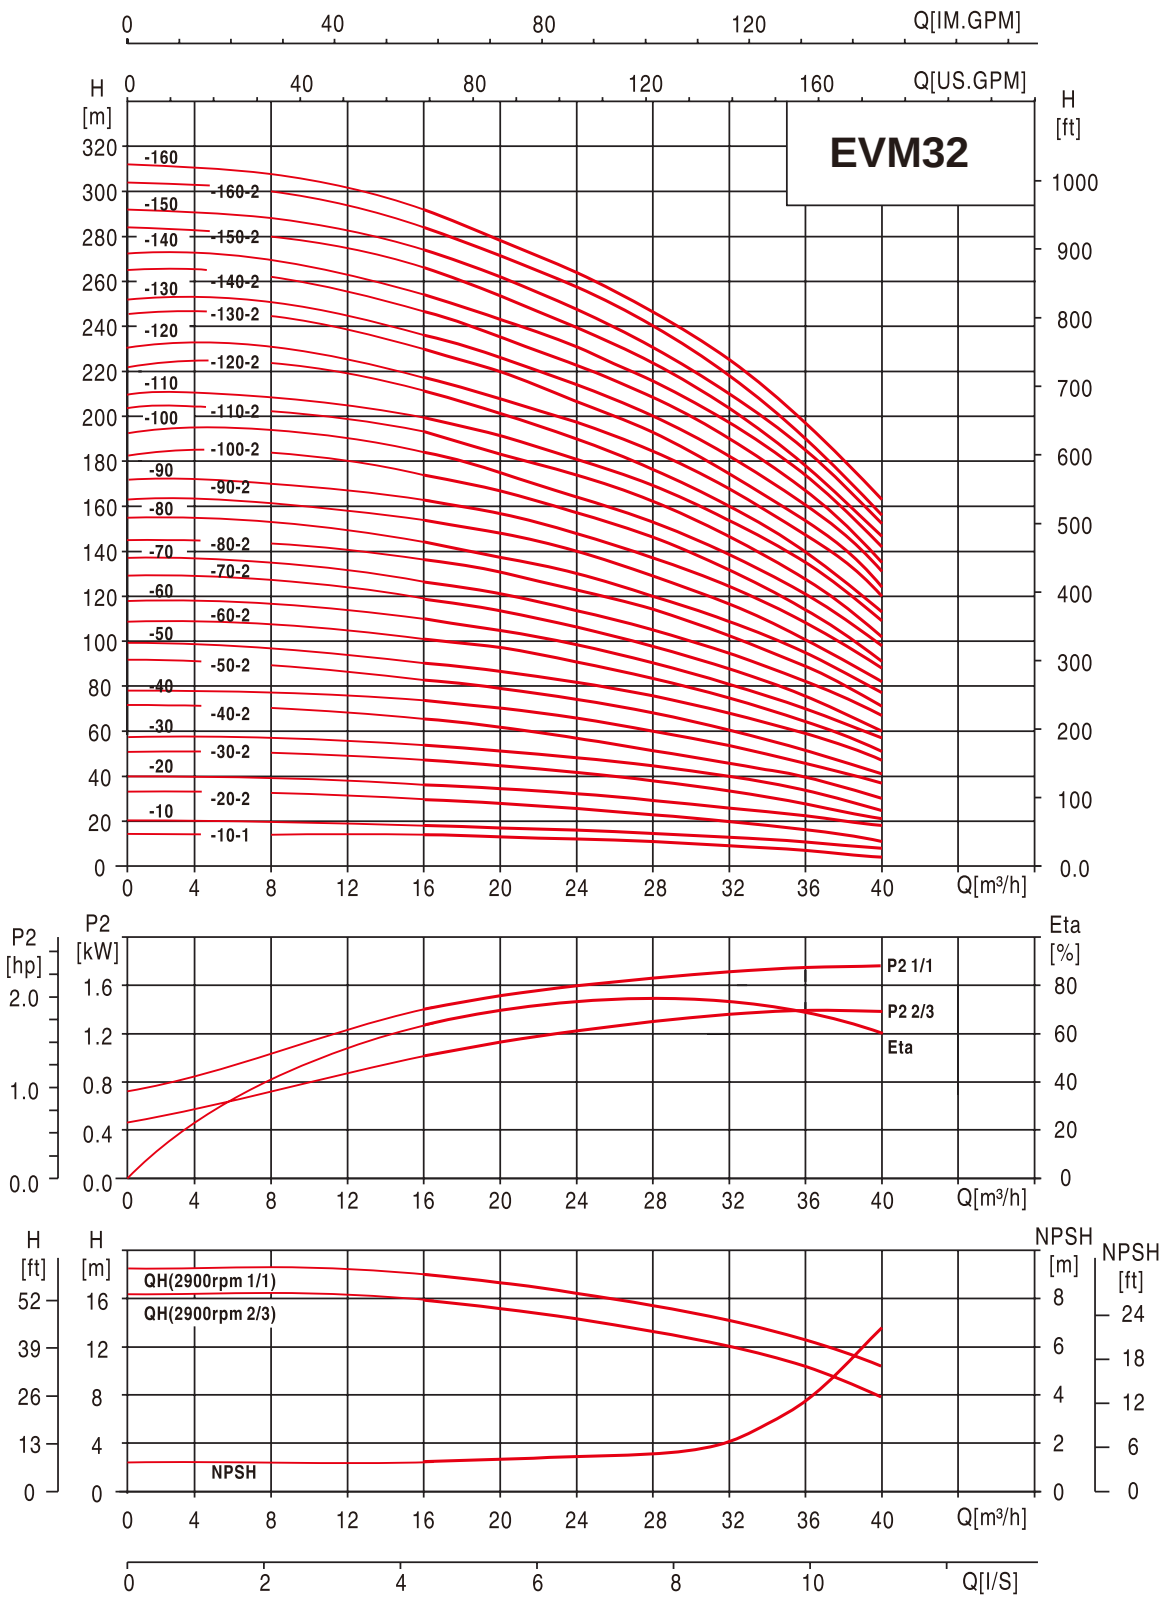

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	16	20	24	28	32	36	40
	(kw)	(Hp)									
EVM32-1-1	1.5	2	2.5"/2.5"	H (m)	14	13	12	11	9	7	4
EVM32-1	2.2	3			18	17	15	14	13	11	8
EVM32-2-2	3.0	4			29	28	26	23	20	16	11
EVM32-2	4.0	5.5			36	34	32	29	27	23	18
EVM32-3-2	5.5	7.5			47	44	41	38	33	28	21
EVM32-3	5.5	7.5			54	51	48	44	40	35	27
EVM32-4-2	7.5	10			65	62	58	53	46	40	30
EVM32-4	7.5	10			72	69	65	59	53	47	37
EVM32-5-2	11	15			83	79	74	68	60	52	41
EVM32-5	11	15			90	86	81	74	67	59	47
EVM32-6-2	11	15			101	97	90	83	74	65	51
EVM32-6	11	15			108	104	97	90	81	72	57
EVM32-7-2	15	20			119	114	107	98	88	78	60
EVM32-7	15	20			126	121	113	105	95	85	67
EVM32-8-2	15	20			136	131	123	114	102	90	71
EVM32-8	15	20			144	138	130	120	109	97	77
EVM32-90-2	18.5	25			154	148	140	128	117	102	82
EVM32-90	18.5	25			162	156	147	136	124	109	88
EVM32-100-2	18.5	25			175	166	157	146	131	115	91
EVM32-100	18.5	25			182	173	164	152	138	122	98
EVM32-110-2	22	30			193	184	173	164	146	128	102
EVM32-110	22	30			200	191	180	168	153	135	109
EVM32-120-2	22	30			211	201	189	178	160	140	113
EVM32-120	22	30			218	208	196	184	167	147	120
EVM32-130-2	30	40			230	218	206	193	174	153	124
EVM32-130	30	40			237	225	213	200	181	160	131
EVM32-140-2	30	40			247	235	222	210	189	165	135
EVM32-140	30	40			255	242	229	216	196	172	142
EVM32-150-2	30	40			266	253	239	224	203	178	145
EVM32-150	30	40			274	260	246	231	210	185	152
EVM32-160-2	30	40			284	270	255	240	218	190	156
EVM32-160	30	40			292	277	262	246	225	197	163

● Installation sketch

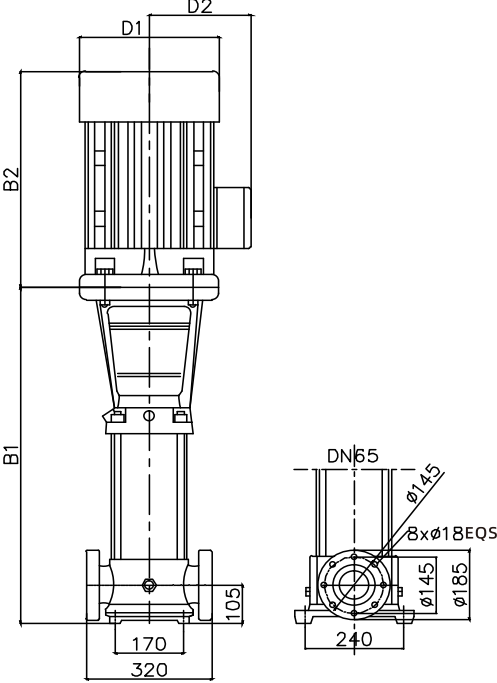

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.


● Size and weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM32-1-1/EVM32-1	505	290	795	190	155	64/68
EVM32-2-2/EVM32-2	575	345/355	920/930	190/230	165/180	77/85
EVM32-3-2/EVM32-3	645	390	1035	260	180	100
EVM32-4-2/EVM32-4	715	390	1105	330	180	109
EVM32-5-2/EVM32-5	890	500	1390	330	255	181
EVM32-6-2/EVM32-6	960	500	1460	330	255	185
EVM32-7-2/EVM32-7	1030	500	1530	330	255	199
EVM32-8-2/EVM32-8	1100	1100	1600	330	255	203
EVM32-9-2/EVM32-9	1170	1170	1720	330	255	222
EVM32-10-2/EVM32-10	1240	1240	1790	330	255	227
EVM32-11-2/EVM32-11	1310	1310	1885	400	285	282
EVM32-12-2/EVM32-12	1380	1380	1955	400	285	276
EVM32-13-2/EVM32-13	1450	1450	2100	450	310	337
EVM32-14-2/EVM32-14	1520	1520	2170	450	310	341
EVM32-15-2/EVM32-15	1590	1590	2240	450	310	345
EVM32-16-2/EVM32-16	1660	1660	2310	450	310	350

EVM42, 50Hz

● Performance curve


2900rpm

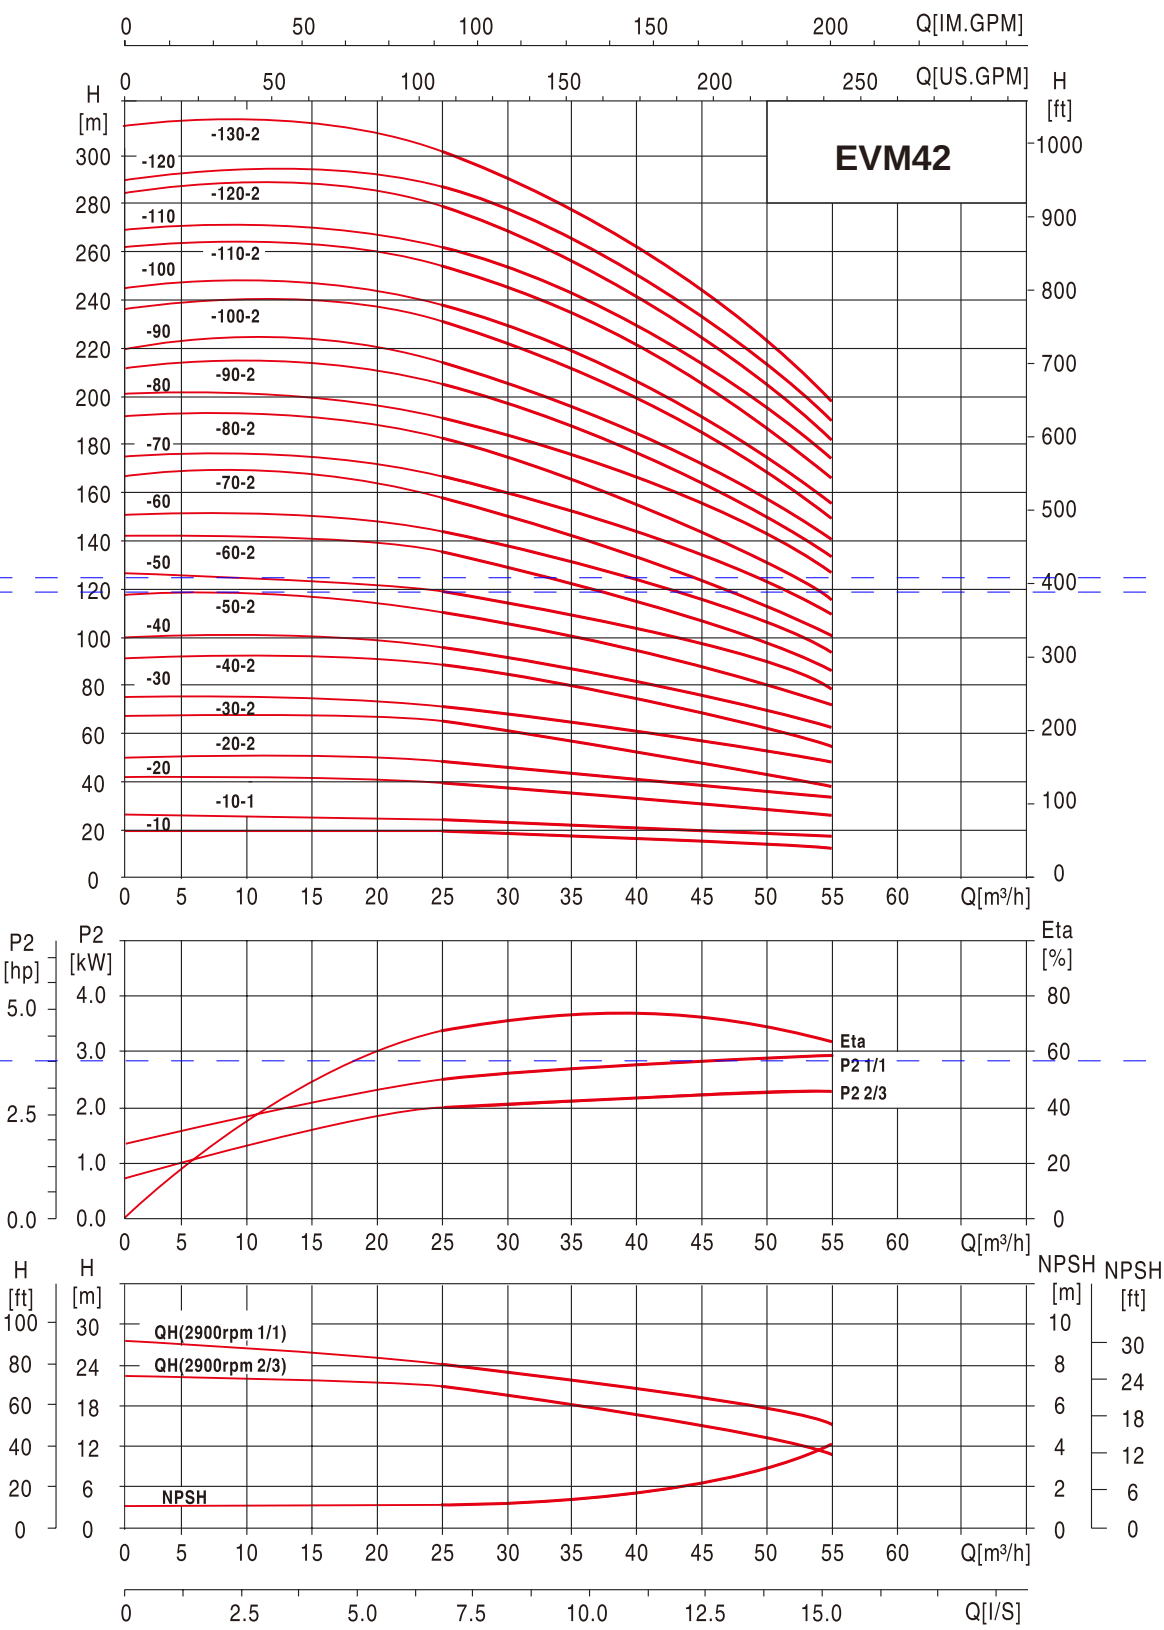

● Performance table

Model	Driving motor		Inlet/ Outlet	Q (m³)	25	30	35	40	42	45	50	55
	(kw)	(Hp)										
EVM42-1-1	3.0	4	3"/3"	H (m)	20	19	18	17	16	15	13	11
EVM42-1	4.0	5.5			24	23	22	21	20	19	18	16
EVM42-2-2	5.5	7.5			40	38	36	33	32	30	27	23
EVM42-2	7.5	10			48	46	44	42	41	39	35	31
EVM42-3-2	11	15			63	61	58	54	52	50	44	38
EVM42-3	11	15			71	69	66	63	61	58	53	47
EVM42-4-2	15	20			87	84	80	75	73	69	62	54
EVM42-4	15	20			95	92	88	84	81	78	71	62
EVM42-5-2	18.5	25			111	107	102	96	93	88	80	69
EVM42-5	18.5	25			119	115	110	105	101	97	88	78
EVM42-6-2	22	30			135	130	124	117	113	108	97	85
EVM42-6	22	30			143	138	132	125	122	116	106	93
EVM42-7-2	30	40			158	152	146	138	134	127	115	100
EVM42-7	30	40			166	161	154	146	142	135	124	109
EVM42-8-2	30	40			182	175	168	159	154	146	133	116
EVM42-8	30	40			190	184	176	167	162	154	141	124
EVM42-9-2	30	40			205	198	190	180	174	166	150	132
EVM42-9	37	50			214	207	198	188	183	174	159	140
EVM42-10-2	37	50			230	221	212	200	194	185	168	147
EVM42-10	37	50			238	230	220	209	203	193	177	155
EVM42-11-2	45	60			255	246	236	223	217	206	188	165
EVM42-11	45	60			263	255	244	232	225	214	196	173
EVM42-12-2	45	60			280	270	259	245	238	226	206	181
EVM42-12	45	60			289	280	268	255	247	236	216	190
EVM42-13-2	45	60			305	294	282	267	259	247	225	198

● Installation sketch

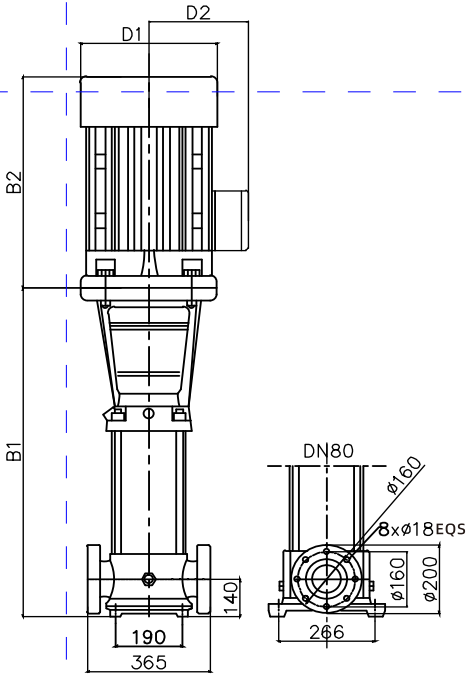

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.

● Size and weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
EVM42-1-1/EVM42-1	561	345/355	906/916	197/230	165/188	83/90
EVM42-2-2/EVM42-2	641	390	1031	260	208	105/110
EVM42-3-2/EVM42-3	826	500	1326	330	255	183
EVM42-4-2/EVM42-4	906	500	1406	330	255	197
EVM42-5-2/EVM42-5	986	550	1536	330	255	221
EVM42-6-2/EVM42-6	1066	575	1641	360	285	261
EVM42-7-2/EVM42-7	1146	650	1796	400	310	320
EVM42-8-2/EVM42-8	1226	650	1876	400	310	320
EVM42-9-2/EVM42-9	1306	650	1956	400	310	328/352
EVM42-10-2/EVM42-10	1386	650	2036	400	310	355
EVM42-11-2/EVM42-11	1466	685	2151	450	345	426
EVM42-12-2/EVM42-12	1546	685	2231	450	345	432
EVM42-13-2	1626	685	2311	450	345	438