


DL SERIES TWO-POLE SUBMERSIBLE SEWAGE CUTTER PUMP

PRODUCT NOMENCLATURE

100	DL	45	22	7.5
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated head (m)	Power (kW)

RANGE CHARACTERISTICS


Power	0.75-7.5 kW
Poles	2
Discharge	DN50 - 150
Max flow rate	170 m³/h
Max head	32 m

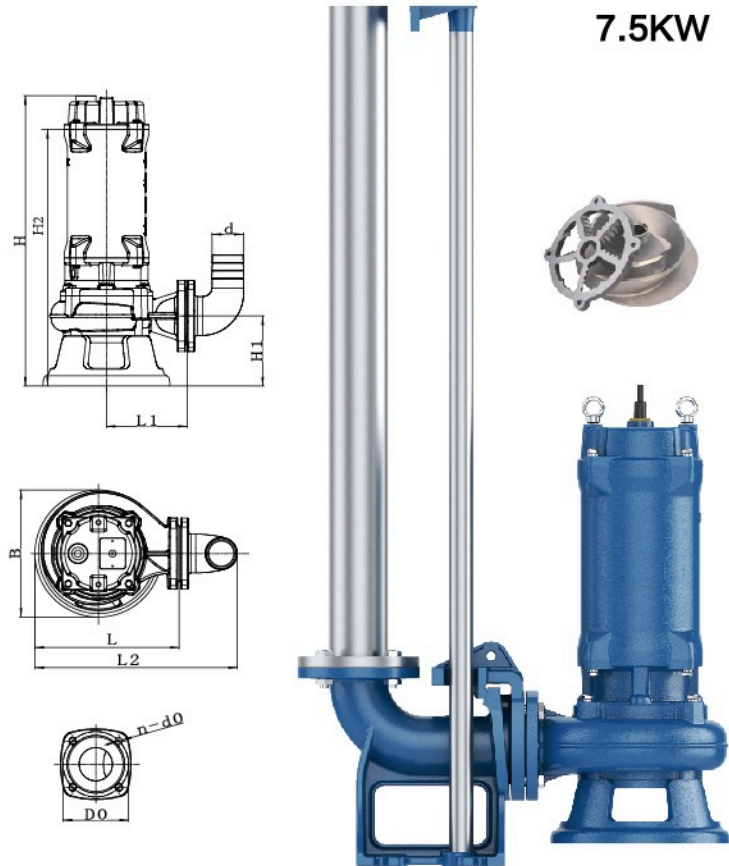

DIMENSION

Type	A (mm)	L (mm)	L2 (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	d (mm)	D0 (mm)	n-d0 (mm)
50DL10-10-0.75	40	215	309	122	186	453	94	378	48	110	13
50DL12-10-1.1	40	215	309	122	186	453	94	378	48	110	13
50DL15-15-1.5	50	237	334	131	212	485	111	409	48	110	13
65DL25-15-2.2	65	286	400	160	252	503	128	426	62	130	13
80DL45-12-3.0	80	270	390	165	219	555	120	487	74	150	18
80DL50-15-4.0	80	290	410	164	253	576	139	509	74	150	18
100DL65-12-4.0	100									170	18
100DL70-15-5.5	100	310	470	170	280	645	146	575	100	170	18
100DL100-15-7.5	100	320	480	180	293	655	152	585	100	170	18

DL SERIES TWO-POLE SUBMERSIBLE SEWAGE CUTTER PUMP

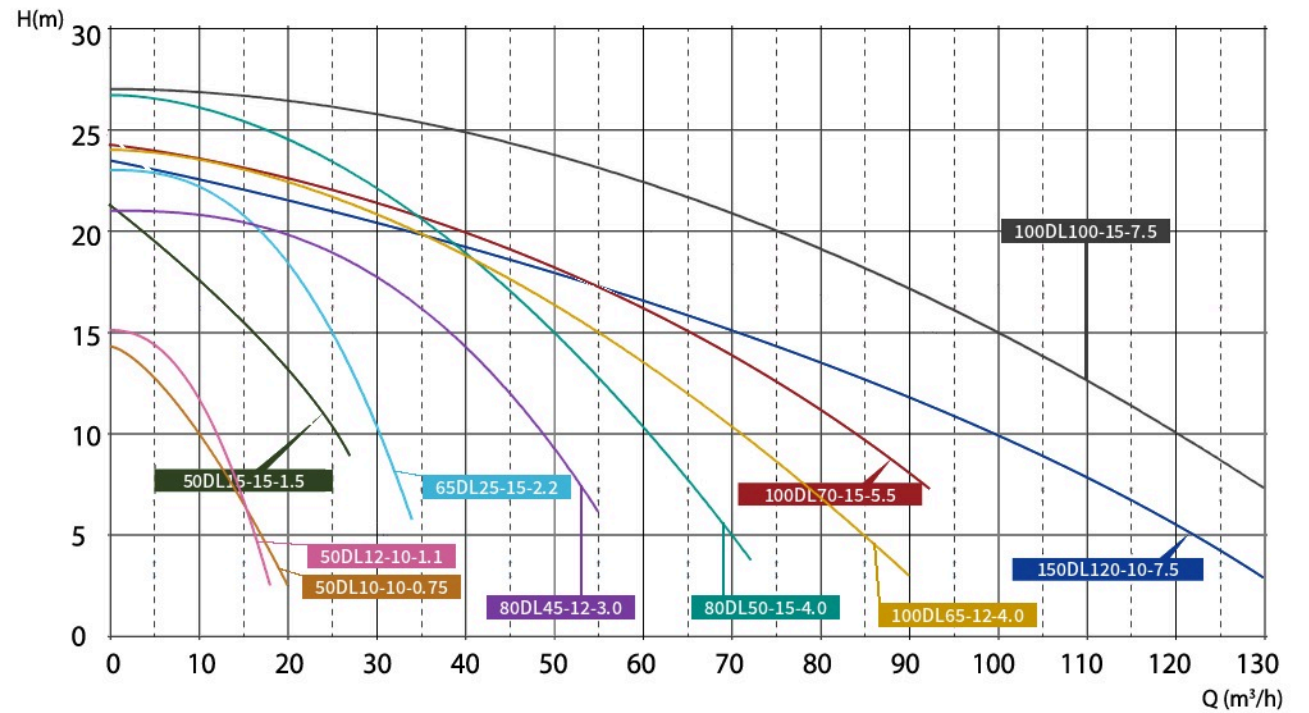

DL SERIES 0.75-7.5KW TWO-POLE SUBMERSIBLE SEWAGE CUTTER PUMP - PERFORMANCE DATA

TYPE	Voltage (V)	Power		Outlet		Particle (mm)	Q.rated (m³/h)	H.rated (m)	Q. max (m³/h)	H.max (m)	Speed (r/min)	G.W. (kg)	Packing size (cm)
		(KW)	(HP)	(inch)	(mm)								
50DL10-10-0.75	3Ph/380V	0.75	1	2"	50	20	10	10	20	14.3	2860	26.6	55*22*24
50DL12-10-1.1	3Ph/380V	1.1	1.5	2"	50	20	12	10	18	15.1	2860	27.5	56*23*25
50DL15-15-1.5	3Ph/380V	1.5	2	2"	50	20	12	15	29	19.6	2860	36	59*26*27
65DL25-15-2.2	3Ph/380V	2.2	3	2.5"	65	26	25	15	34	23	2860	41	61*29*29
80DL45-12-3.0	3Ph/380V	3	4	3"	80	32	40	12	55	21	2860	47	63*26*30
80DL50-15-4.0	3Ph/380V	4	5.5	3"	80	32	45	17	72.2	26.7	2860	54	64*29*32
100DL65-12-4.0	3Ph/380V	4	5.5	4"	100	32	65	12	90	24	2860	55	64*29*32
100DL70-15-5.5	3Ph/380V	5.5	7.5	4"	100	40	65	15	111	24	2860	69	73*29*35
100DL100-15-7.5	3Ph/380V	7.5	10	4"	100	40	100	12	142	27	2860	78	73*29*35


DL SERIES TWO-POLE SUBMERSIBLE SEWAGE CUTTER PUMP

PRODUCT NOMENCLATURE

100	DL	80	25	11
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated head (m)	Power (kW)

RANGE CHARACTERISTICS

Power	11-22 kW
Poles	2
Discharge	DN50 - 150
Max flow rate	300 m³/h
Max head	50 m

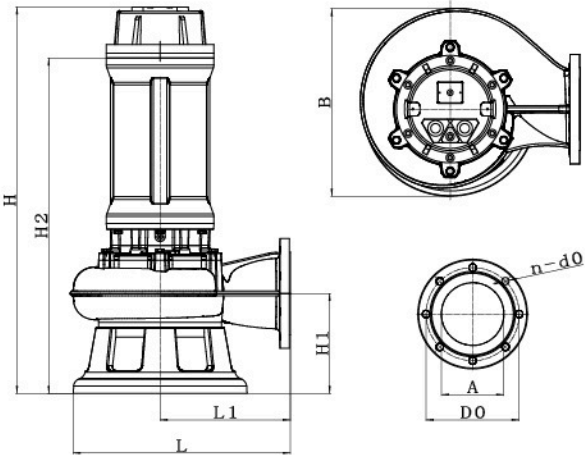


DIMENSION

Type	A (mm)	L (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	D0 (mm)	n-d0 (mm)
150DL150-15-11	150	525	315	455	930	242	790	225	8-18
150DL150-25-15	150	525	315	455	930	242	790	225	8-18
150DL200-20-18.5	150	525	315	455	1030	242	890	225	8-18
150DL200-25-22	150	525	315	455	1030	242	890	225	8-18



DL SERIES TWO-POLE SUBMERSIBLE SEWAGE CUTTER PUMP

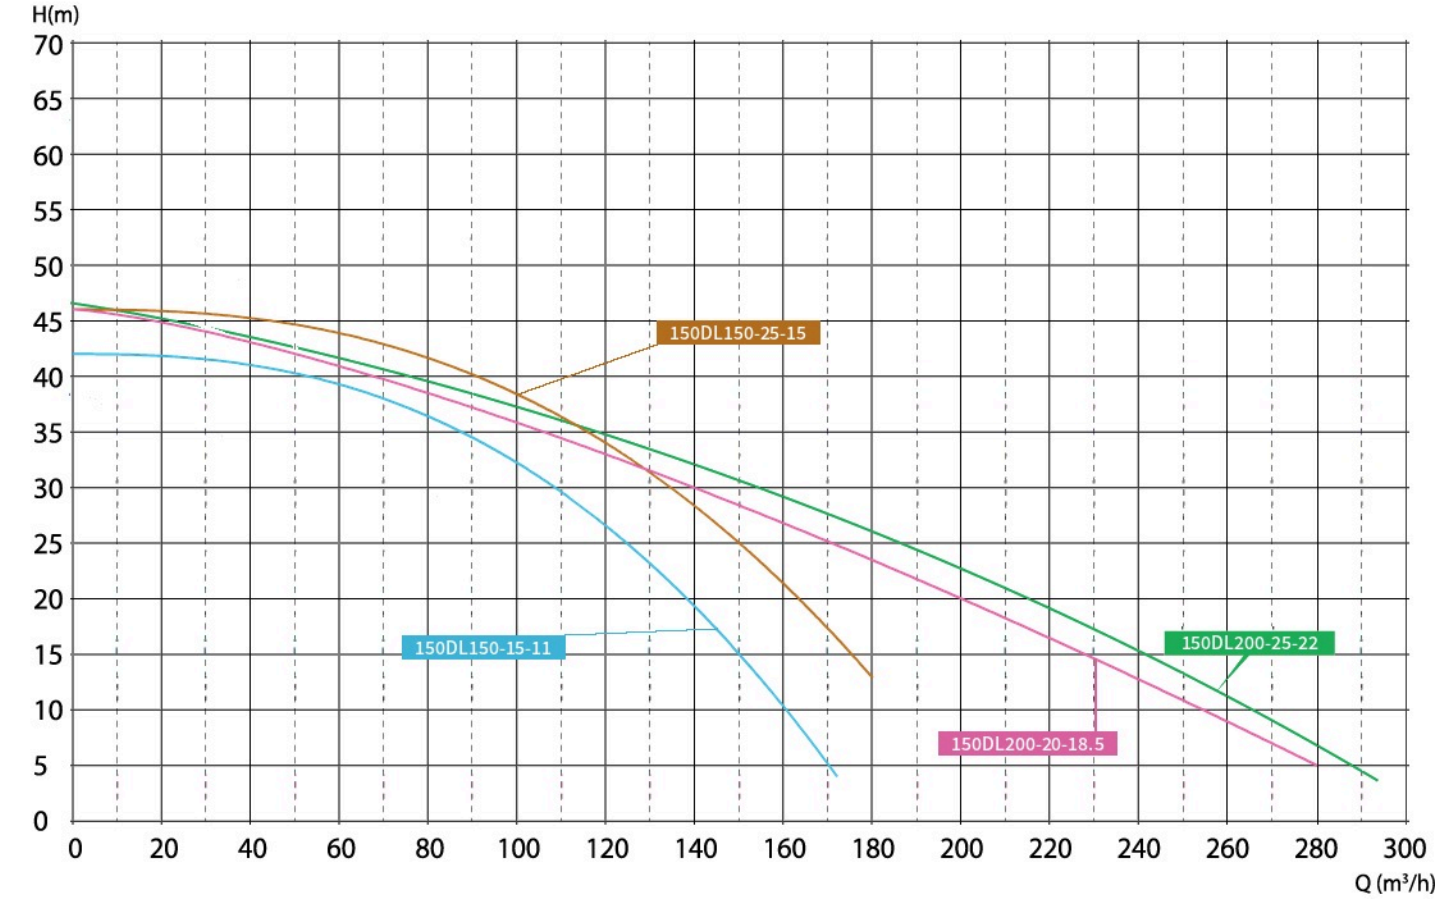

DL SERIES 11-22KW TWO-POLE SUBMERSIBLE SEWAGE CUTTER PUMP – PERFORMANCE DATA

TYPE	Voltage (V)	Power		Outlet		Particle (mm)	Q. rated (m³/h)	H. rated (m)	Q. max (m³/h)	H. max (m)	Speed (r/min)	G.W. (kg)	Packing size (cm)
		(KW)	(HP)	(inch)	(mm)								
150DL150-15-11	3Ph/380V	11	15	6"	150		130	15	172	42	2860	190	51*44*107
150DL150-25-15	3Ph/380V	15	20	6"	150		130	25	180	46	2860	205	
150DL200-20-18.5	3Ph/380V	18.5	25	6"	150		180	20	280	46	2860	239	58*47*115
150DL200-25-22	3Ph/380V	22	30	6"	150		180	25	294	46	2860	243	